

fiberglass



SUPER-HEAVY DUTY FIBERGLASS EXTENSION

Meets or exceeds CSA Grade 1AA, ANSI Type 1AA

- Durable non-conductive fiberglass side rails in high visibility safety yellow
- Riveted rung to rail design maintains continuous strength of fibers and allows for easy repair
- Slip-resistant serrated "D" rungs for safe climbing and comfort
- Traditional raise from the rear pulley design
- Premium heavy duty rung locks for durability
- Large heavy duty pivot feet with slip-resistant rubber pads and ice pick

MODEL	SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT lbs.
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH	
9216D	16'	13'	17 3/8"	15"	16 5/8"	14 1/4"	39
9220D	20'	17'	17 3/8"	15"	16 5/8"	14 1/4"	46
9224D	24'	21'	17 3/8"	15"	16 5/8"	14 1/4"	55
9228D	28'	25'	17 3/8"	15"	16 5/8"	14 1/4"	62
9232D	32'	28'	17 3/8"	15"	16 5/8"	14 1/4"	70
9236D*	36'	32'	17 3/4"	15 1/4"	16 7/8"	14 1/4"	80
9240D*	40'	35'	17 3/4"	15 1/4"	16 7/8"	14 1/4"	90

* 300LB LOAD RATING


SUPER-HEAVY DUTY FIBERGLASS EXTENSION

Meets or exceeds CSA Grade 1AA, ANSI Type 1AA

- Durable non-conductive fiberglass side rails in high visibility safety yellow
- Riveted rung to rail design maintains continuous strength of fibers and allows for easy repair
- Slip-resistant serrated rungs for safe climbing (available in round or "D" profile)
- Top cross over bar allows for ladder to be raised or lowered from front and provides torsional stiffness
- Premium heavy duty rung locks for durability
- Exclusive "1-Piece" foot assembly with spur wheel provides unequalled strength, durability and torsion resistance

MODEL	SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT lbs.
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH	
6216	16'	13'	17 3/8"	15"	16 5/8"	14 1/4"	40
6220	20'	17'	17 3/8"	15"	16 5/8"	14 1/4"	47
6222	22'	19'	17 3/8"	15"	16 5/8"	14 1/4"	53
6224	24'	21'	17 3/8"	15"	16 5/8"	14 1/4"	57
6228	28'	25'	17 3/8"	15"	16 5/8"	14 1/4"	63
6232	32'	28'	17 3/8"	15"	16 5/8"	14 1/4"	71
6216D	16'	13'	17 3/8"	15"	16 5/8"	14 1/4"	41
6220D	20'	17'	17 3/8"	15"	16 5/8"	14 1/4"	48
6222D	22'	19'	17 3/8"	15"	16 5/8"	14 1/4"	54
6224D	24'	21'	17 3/8"	15"	16 5/8"	14 1/4"	58
6228D	28'	25'	17 3/8"	15"	16 5/8"	14 1/4"	64
6232D	32'	28'	17 3/8"	15"	16 5/8"	14 1/4"	72
6236D*	36'	32'	19"	15 1/2"	17 3/4"	14 1/4"	105
6240D*	40'	35'	19"	15 1/2"	17 3/4"	14 1/4"	114

* 300LB LOAD RATING, TRADITIONAL RAISE FROM REAR PULLEY SYSTEM, 4" RAIL, HEAVY DUTY DUAL PIVOT FEET

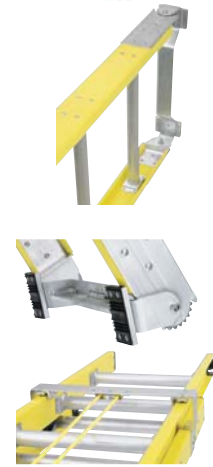

SUPER-HEAVY DUTY FIBERGLASS EXTENSION

Meets or exceeds CSA Grade 1AA, ANSI Type 1AA

- Durable non-conductive fiberglass side rails in high visibility safety yellow
- Riveted rung to rail design maintains continuous strength of fibers and allows for easy repair
- Slip-resistant serrated rungs for safe climbing (available in round or "D" profile)
- Top cross over bar allows for ladder to be raised and lowered from front and provides torsional stiffness
- Premium heavy duty rung locks for durability
- Large heavy duty pivot feet with slip-resistant rubber pads and ice pick

MODEL	SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT lbs.
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH	
5716	16'	13'	17 3/8"	15"	16 1/2"	14 1/4"	39
5720	20'	17'	17 3/8"	15"	16 1/2"	14 1/4"	46
5724	24'	21'	17 3/8"	15"	16 1/2"	14 1/4"	55
5728	28'	25'	17 3/8"	15"	16 1/2"	14 1/4"	62
5732	32'	28'	17 3/8"	15"	16 1/2"	14 1/4"	70
5716D	16'	13'	17 3/8"	15"	16 1/2"	14 1/4"	40
5720D	20'	17'	17 3/8"	15"	16 1/2"	14 1/4"	47
5724D	24'	21'	17 3/8"	15"	16 1/2"	14 1/4"	56
5728D	28'	25'	17 3/8"	15"	16 1/2"	14 1/4"	63
5732D	32'	28'	17 3/8"	15"	16 1/2"	14 1/4"	71