



EXTENDED RANGE 360° SENSOR CEILING MOUNT • LINE VOLTAGE • PASSIVE INFRARED (PIR)

SPECIFICATIONS

FEATURES

- 100% Digital PIR Detection, Excellent RF Immunity
- 360° Coverage Pattern
- Self-Contained Relay, No Power Pack Needed
- No Minimum Load Requirements
- Interchangeable Hot & Load Wires, Impossible to Wire Backwards
- Push-Button Programmable
- Adjustable Time Delays
- No Field Calibration or Sensitivity Adjustments Required
- Convenient Test Mode
- 100 hr Lamp Burn-in Timer
- Green LED Indicator

LAMPMAXIMIZER® TECHNOLOGY

- Protects Lamp Life while Maximizing Energy Savings
- Minimum On Timer (15 min default)
- Occ. Time Delay (10 min default)
- LampMaximizer+ Mode - Optimizes Lamp Life & Energy Savings (disabled by default)
- Switch Counter (in 1000's)
- Total Lamp On Time (in hrs)

PHYSICAL SPECS

SIZE 4.55" Dia. (11.56 cm)
1.55" Deep (3.94 cm)
WEIGHT 6 oz
MOUNTING
3.5" Octagon Box
Single Gang Handy Box
COLOR White

ELECTRICAL SPECS

MAXIMUM LOAD
800 W @ 120 VAC
1200 W @ 277 VAC
1500 W @ 347 VAC
MINIMUM LOAD None
MOTOR LOAD 1/4 HP
FREQUENCY 50/60 Hz
DIMMING LOAD Sinks < 20mA;
~40 Ballasts @ .5mA each

ENVIRONMENTAL SPECS

OPERATING TEMP
14° to 160° F (-10° to 71° C)
STORAGE TEMP
-14° to 160° F (-26° to 71° C)
RELATIVE HUMIDITY
20 to 90% non-condensing
SILICONE FREE
ROHS COMPLIANT

OVERVIEW

The **CMR 10** Series incorporates Passive Infrared (PIR) technology into an attractive and economical line powered sensor to provide maximum viewing from the ceiling. When mounted at 9 ft (2.74 m), this sensor views up to 28 ft (8.53 m) in all directions. Its circular coverage pattern is designed for walking motions; making it ideal for T-shaped intersections in corridors, or other areas where wall mounting a sensor is not practical. Low ceiling heights are also best covered with the **CMR 10**. For example, when mounted at only 7 ft (2.13 m), the height of pick aisles in many distribution centers, the **CMR 10** provides a 32 ft (9.75 m) diameter pattern of coverage. In applications where detection of minor motion is also required, the **CMR PDT 10** Series Dual Technology sensor is recommended.

SENSOR OPERATION

The sensor detects changes in the infrared energy given off by occupants as they move within the field-of-view. When occupancy is detected, a self-contained relay switches the connected lighting load on. The sensor is line powered, switches line voltage, and requires no field calibration or sensitivity adjustments.

LAMPMAXIMIZER®

This sensor also contains patent pending LampMaximizer technology that allows users to aggressively target energy savings while still protecting lamp life. A minimum on timer, factory set at 15 minutes, helps preserve lamp life by eliminating all lamp cycles shorter than lamp warranties specify.

A standard occupancy time delay is also present that ensures lights turn off (assuming minimum on timer has elapsed) if no occupancy is detected. This timer is factory set at 10 minutes to promote energy savings, but is adjustable between 30 seconds and 20 minutes. These adjustments can be done manually, through the unit's push-button, or automatically every two weeks through an advanced mode, called LampMaximizer+, that determines the optimum time delay in order to maximize both lamp life and energy savings. Additionally, this sensor maintains statistics on total lamp on time and number of cycles.

OPTIONS

OCCUPANCY CONTROLLED DIMMING (D)

- Provides dimming output to control 0-10 VDC dimmable ballasts
- Provides a second occupancy time-out period that enables the lights to go to a dim setting before turning off
- Adjustable max/min dim setting

PHOTOCELL (P)

- Auto set-point calibration
- Two selectable modes of operation
- On/Off mode: Photocell has full control during periods of occupancy
- Inhibit mode: Photocell can prevent lights from turning on if adequate daylight is available, but can not turn lights off

PHOTOCELL W/ DIMMING (ADC)

- Photocell within sensor maintains total room light level by controlling levels of 0-10 VDC dimmable ballasts
- Photocell also has full on/off control during periods of occupancy
- Provides a second occupancy time-out period that enables the lights to go to a dim setting before turning off

Note: LampMaximizer+ features not available with ADC option

347 VAC (347)

- Allows sensor to be powered from and switch 347 VAC

LOW TEMP/HIGH HUMIDITY (LT)

- Sensor is corrosion resistant to moisture
- Operates down to -40° F/C



TITLE 24
MADE in U.S.A.
5 YEAR WARRANTY

ORDERING INFO CMR 10 [DIMMING/PHOTOCELL] [VOLTAGE] [TEMP/HUMIDITY]

DIMMING / PHOTOCELL CHOOSE ONE ONLY

Blank = None
D = Occupancy Controlled Dimming
P = Photocell
ADC = Photocell w/ Dimming

VOLTAGE

Blank = 120/277 VAC
347 = 347 VAC

TEMP/HUMIDITY


Blank = Standard
LT = Low Temp

COVERAGE PATTERN


10 EXTENDED RANGE 360° LENS

- Best choice for large motion detection (e.g. walking)
- Viewing angle of 67° in a 360° conical shaped pattern
- Provides 28 ft (8.53 m) radial coverage when mounted to standard 9 ft (2.74 m) ceiling
- 7 to 15 ft (2.13 to 4.57 m) mounting heights provide 16 to 36 ft (4.88 to 10.97 m) radial coverage

SIDE VIEW

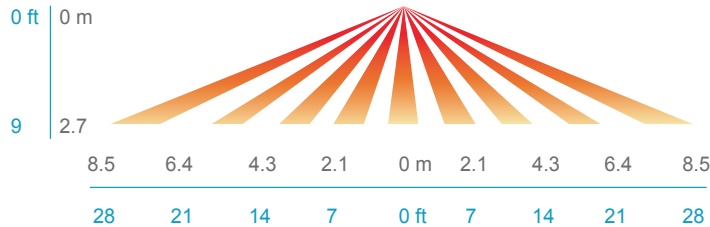

TOP VIEW

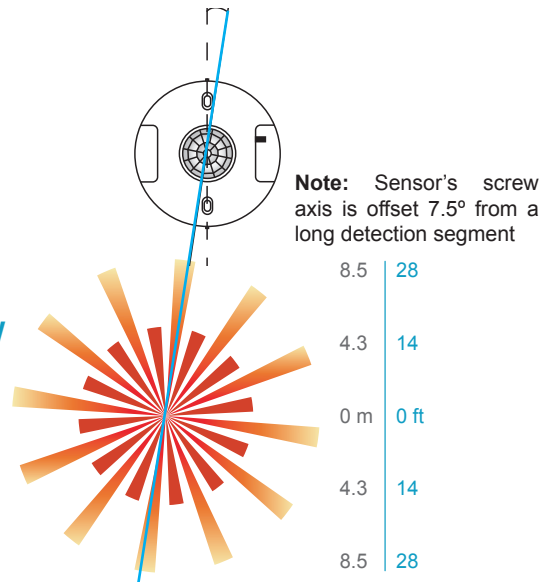

WIRING (DO NOT WIRE HOT)

STANDARD WIRING

- BLACK*** - Line Input
 - BLACK*** - Load Output
 - WHITE** - Neutral
- *BLACK wires can be reversed

347 VAC OPTION (347)

Black wires are replaced w/ Red wires


DIMMING OPTIONS (D, ADC)

- VIOLET** - Connect to Violet control wire from 0-10 VDC dimmable ballast
- GRAY** - Connect to Gray common wire from ballast

INITIAL POWER UP


The sensor's relay is shipped in a latched closed position so the lights will come on upon initial power-up. If the lights do not immediately turn on (initial installation only) the latching relay opened during shipment and will close within 30 secs.

Note: If the sensor loses power, the internal relay will latch to on.

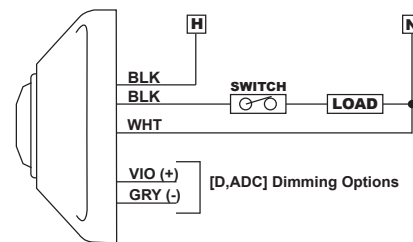


SENSORS IN PARALLEL

Sensors may be wired in parallel; however, the maximum load ratings stay the same. Do not wire sensors with P or ADC option in parallel.

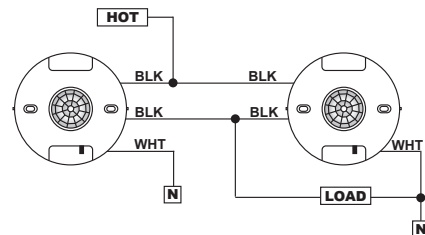

INSTALLATION


- Sensor's mounting holes align with 3.5" octagon or single gang handy box (screws not provided)
- Sensor will detect motions crossing segments more effectively than motions parallel to beams
- For optimal detection, position sensor such that segments are crossed upon entrance and unable to view outside the space



- A:** When walking across beam, detection will occur at approximately 28 feet (8.53 m).
- B:** When walking into beam, detection will occur at approximately 24 feet (7.32 m).

PROGRAMMING

Refer to instruction card IC7.001 for default settings and directions on programming the sensor via the push-button.

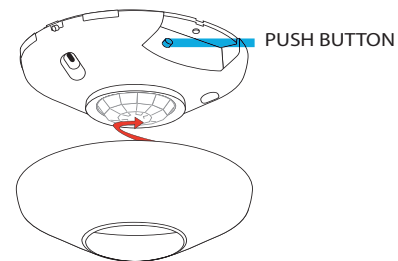

sensorswitch

An AcuityBrands Company

WARRANTY: Sensor Switch, Inc. warrants these products to be free of defects in manufacture and workmanship for a period of 60 months. Sensor Switch, Inc., upon prompt notice of such defect, will, at its option, provide a Returned Material Authorization number and repair or replace returned product.

LIMITATIONS AND EXCLUSIONS: This Warranty is in full lieu of all other representation and expressed and implied warranties (including the implied warranties of merchantability and fitness for use) and under no circumstances shall Sensor Switch, Inc. be liable for any incidental or consequential property damages or losses.

TS-CMR-001A