


URGQPQXJ8



Ultra Low Loss (ULL) Singlemode MPO8 (Unpinned) to MPO8 (Pinned), Fiber Extension Cable Assembly, 8-Fiber, Low Smoke Zero Halogen

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Gray
Color, boot B	Gray
Color, connector A	Green
Color, connector B	Green
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC
Interface, Connector B	MPO-08/APC
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8

Dimensions


Breakout Length	33 in
Cable Assembly Length Range (m)	1 – 305

URGQPQXJ8

Cable Assembly Length Range (ft)

1 – 999

Ordering Tree

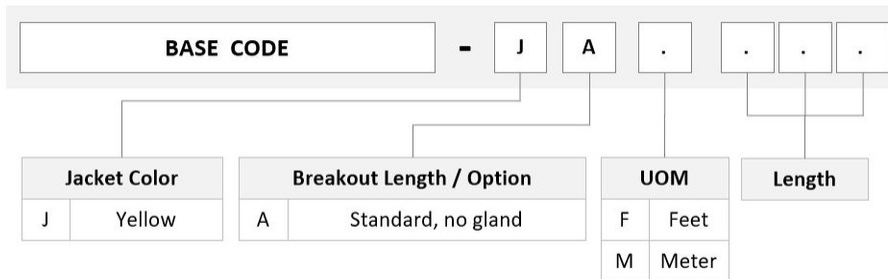

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted



Included Products

760237972 – Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12
N-012-MP-8G1-F30YL/D fiber

URGQPQXJ8

- 860637705 - MPO8, ULTRA LOW LOSS, MALE, SM, GREEN, 3mm
- 860637706 - MPO8, ULTRA LOW LOSS, FEMALE, SM, GREEN, 3mm