

ARGMXMPGD



Singlemode MPO12 (Pinned) to MPO12 (Unpinned), Fiber Patch Cord, 12-Fiber, Method A, Low Smoke Zero Halogen

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Black
Color, boot B	Black
Color, connector A	Green
Color, connector B	Green
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC
Interface, Connector B	MPO-12/APC
Jacket Color	Yellow
Polarity	Method A
Total Fibers, quantity	12

Dimensions

Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	1 – 999

ARGMXMPGD

Ordering Tree

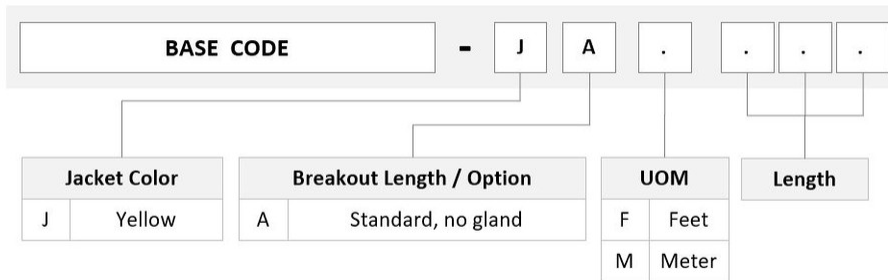

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted



Included Products

- 760237972 N-012-MP-8G1-F30YL/D – Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12 fiber
- 860638317 – MPO12, ULTRA LOW LOSS, MALE, SM, GREEN, 3mm
- 860638318 – MPO12, ULTRA LOW LOSS, FEMALE, SM, GREEN, 3mm

ARGMXMPGD
