


Conduit Fittings

Conduit Couplings

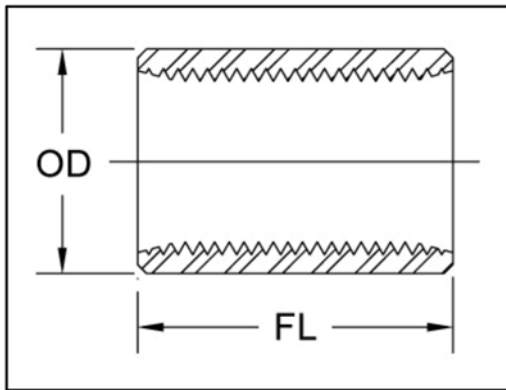

Size	Threads per inch	OD inches	Minimum Length FL
1/2	14	1.010	1-5/8
3/4	14	1.250	1-41/64
1	11-1/2	1.525	1-31/32
1-1/4	11-1/2	1.869	2-1/32
1-1/2	11-1/2	2.155	2-1/16
2	11-1/2	2.650	2-1/8
2-1/2	8	3.250	3-3/16
3	8	3.870	3-5/16
3-1/2	8	4.500	3-13/32
4	8	4.875	3-33/64
5	8	6.000	3-61/64
6	8	7.100	4-1/4

Material: Galvanized Steel, 304 Stainless and Aluminum Conduit Couplings meet requirements of both CSA and UL.
Aluminum Conduit Couplings are made from 6063 alloy with a maximum Copper content of 0.1%.

Notes: 304 Stainless Steel Conduit Couplings are available only up to 4" size.
O.D. of Stainless Steel Conduit Couplings may be larger than shown.