

URVQPQPJ8



Ultra Low Loss (ULL) OM5 MPO8 (Unpinned) to MPO8 (Unpinned), Fiber Extension Cable Assembly, 8-Fiber, Low Smoke Zero Halogen

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly Fiber patch cord, MPO
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Gray
Color, boot B	Gray
Color, connector A	Lime green
Color, connector B	Lime green
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Lime green
Interface, Connector A	MPO-08/UPC
Interface, Connector B	MPO-08/UPC
Jacket Color	Lime green
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8

Dimensions


Breakout Length	33 in
Cable Assembly Length Range (m)	1 – 305

URVQPQPJ8

Cable Assembly Length Range (ft)

1 – 999

Ordering Tree

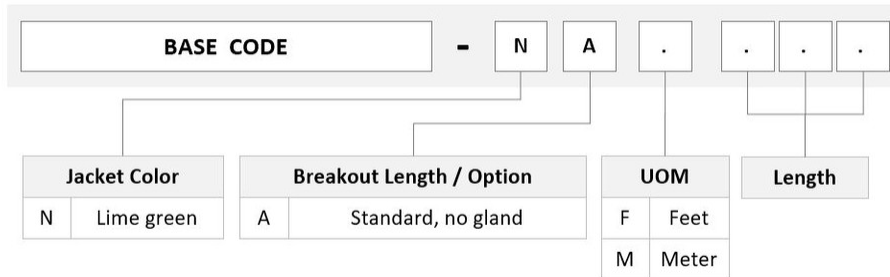

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted



Included Products

760229039
N-012-MP-5G-F30LM/D

– LazrSPEED® Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12 fiber

URVQPQPJ8

860633311

- MPO8, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm