


UGXMXMXAF

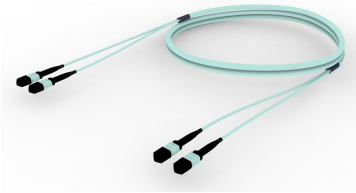

Ultra Low Loss (ULL) OM4 MPO12 (Pinned) to MPO12 (Pinned), Fiber Trunk Cable Assembly, 24-Fiber, Plenum

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Black
Color, boot B	Black
Color, connector A	Aqua
Color, connector B	Aqua
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC
Interface, Connector B	MPO-12/UPC
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	24

Dimensions

Breakout Length	33 in
------------------------	-------

UGXMXMXAF

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

Ordering Tree



Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° 4.40 lb @ 90 °
--	---------------------------------

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM4, LazrSPEED®

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor Plenum

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted



Included Products

760045351

UGXMXMXAF

- P-024-MP-5K-F12AQ - LazrSPEED® Plenum MPO Trunk Cable, 24 fiber with 12 fiber subunits
- 860366228 - MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm