


AQXMPMPGD

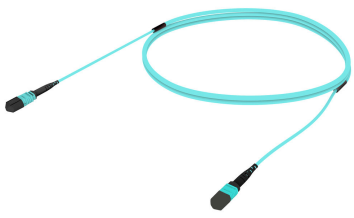

OM4 MPO12 (Unpinned) to MPO12 (Unpinned), Fiber Patch Cord, 12-Fiber, Method A, Plenum

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Black
Color, boot B	Black
Color, connector A	Aqua
Color, connector B	Aqua
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC
Interface, Connector B	MPO-12/UPC
Jacket Color	Aqua
Polarity	Method A
Total Fibers, quantity	12

Dimensions

Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	1 – 999

AQXMPMPGD

Ordering Tree

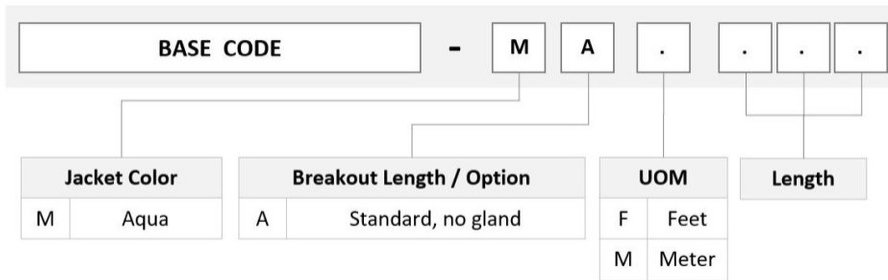

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted



Included Products

- 760074997 - LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12 P-012-MP-5K-F30AQ fiber
- 860366210 - MPO12, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm