

INDUSTRIAL WORK DAY™ GENERAL PURPOSE ENAMEL SPRAY PAINTS

A Quality Finish for Your Hard Industrial Work Day Needs.

- Smooth, durable coating
- Economical solution for miscellaneous spray paint needs
- Interior/external use
- Fast drying



CLEANERS, DEGREASERS
LUBES AND SEALANTS

SUPERIOR
LUBRICANTS


PAINTS, COATINGS
AND PRIMERS

CAULKS, SEALANTS
AND ADHESIVES

BRUSHES, ROLLER COVERS
AND ACCESSORIES

Industrial Work Day™ Aerosol Paints offer an economical solution to marking, color coding and miscellaneous spray paint needs where long term quality and durability are not required. These paints are available for shipment with other Krylon Industrial products.

For Interior/External Use On: Marking, color coding and touch-up for a variety of metal and wood surfaces.

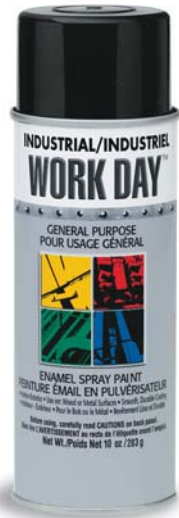

PHYSICAL PROPERTIES

RESIN TYPE: VT Alkyd (exception; Metallic Gold is a lacquer)

NET WEIGHT: 10 oz.

CASE PACK: 12

DRYING TIME @ 70°F @ 50% R.H.

TO TOUCH: 15 minutes

TO HANDLE: 2 hours

MAXIMUM HARDNESS: 5 days

RECOAT: Before 4 hours; or after 5 days

VOC/MIR:

NON-FLAT PAINT: $\geq 65\%$ VOC/ ≥ 1.50 MIR

FLAT PAINT AND PRIMER: $\geq 60\%$ VOC/ ≥ 1.20 MIR

FLASH POINT: -20

COVERAGE PER AEROSOL (THEORETICAL):

9-13 square feet

TEMPERATURE RESISTANCE: 325°F

GAS & OIL RESISTANCE: Gas will remove;

no effect with oil

SHELF LIFE: 3 years from date of manufacture

CLEAN-UP: Lacquer thinner

PRIMER: Recommended

SURFACE PREPARATION

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Remove dirt, grease, wax, moisture, rust and loose paint from surface. Scuff-sand rusted, glossy or hard surfaces. Prime bare or rusted metal. Protect adjacent areas from overspray.

APPLICATION

Use at room temperature. Shake can well until ball rattles and repeat for 10 seconds after each minute of use. Spray 10–12 inches from surface. Spray several thin coats to avoid runs or drips. Dries to touch in 10-15 minutes. Can be handled after one hour. Clear valve after each use by turning can upside down and spraying until clear gas comes out. If spray button becomes clogged, wear eye protection, wipe off the button opening with lacquer thinner - DO NOT stick pin in spray button opening.

PACKAGING

Part #	UPC Code	Color
A04401	0-75577-04401-6	Gloss White
A04402	0-75577-04402-3	Gloss Black
A04403	0-75577-04403-0	Blue
A04404	0-75577-04404-7	Gloss Red
A04405	0-75577-04405-4	Gray
A04406	0-75577-04406-1	Yellow
A04407	0-75577-04407-8	Gloss Pink
A04408	0-75577-04408-5	Green
A04409	0-75577-04409-2	Sky Blue
A04410	0-75577-04410-8	Gold
A04412	0-75577-04412-2	Flat Black
A04413	0-75577-04413-9	Orange
A04414	0-75577-04414-6	Clear
A04418	0-75577-04418-4	Gray Primer
A04419	0-75577-04419-1	Red Primer
A04420	0-75577-04420-7	Dark Gray
A04422	0-75577-04422-1	Flat White
A04431	0-75577-04431-3	Brown
A04437	0-75577-04437-5	Oyster White
A04456	0-75577-04456-6	True Blue
A04457	0-75577-04457-3	Aluminum

CARTON DIMENSIONS:

L 8.44"x W 5.75" x H 8.44"

RESOURCES

MSDS/PRODUCT DATA SHEETS:


www.KPG-Industrial.com

CUSTOMER SERVICE: 1-800-777-2966

TECHNICAL INFORMATION: 1-800-251-2486

COLOR SELECTION GUIDE

AVAILABLE IN FLAT AND GLOSS ENAMEL



AVAILABLE IN GLOSS ENAMEL ONLY



Distributed By:



INDUSTRIAL

Krylon Products Group

101 Prospect Ave. NW
Cleveland, OH 44115
www.KPG-Industrial.com
Tel: 1-800-777-2966