

Adagio



INSTALLATION AND CONNECTION

Recommended installation height

86 cm (34 in).


Clearances

- Front: 50 cm (20 in)
- ◀ Sides: 10 cm (4 in)
- ▲ Above: 20 cm (8 in)
- ▼ Underneath: 30 cm (12 in).

Installation Quick mounted surface installation with easy snap-on bracket that also serves as marking template.


Connection 240-V unit: Flexible cord connection, including junction box. Installation requires 2 in X 3 in wall box (not included).


Note 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

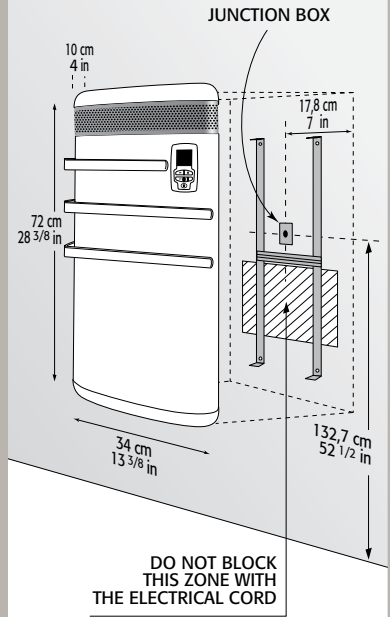

HEATING ELEMENTS

Total capacity 1400 W

 **Convection** (600 W) X-shaped, monoblock element made of surface-treated extruded aluminum.

 **Fan-forced heat** on demand (800 W). Low-thermal-mass heating element combined with low-pressure blower.

Thermal protection - Convection Automatic reset overheat protection.

- **Fan-forced heat** Resettable overheat protection. Reset by turning heater off.

TEMPERATURE CONTROL

 **Electronic thermostat** Built-in electronic proportional-action thermostat ultraprecise to 1/10°C (1/5°F).

Electronic timer with indicator light, for 5 to 90 minutes of accelerated heating.

Programmer Programmer-compatible, pilot wire only.

CONTROL PANEL

 **Select unit of temperature in °C or °F** by key combination.

Location Front panel.

LCD backlit screen with controls lockable by key combination.

On/Off button with indicator light.

Timer button with indicator light.


24-hr button with indicator light stores the Chrono setting, for daily bathroom preheating.

« + and - » buttons control the temperature setting.

Locked indicator light.

Heating indicator light.

CABINET

 **Steel** construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.

Cabinet Splash-proof construction with rounded edges, for a safe installation in the bathroom.

Airflow Bottom flow air outlet directs the hot air on the towels and towards the centre of the room.

Accessories Three (3) towel bars included.

Colour BB = White

MODEL	Catalogue No.	Colour	Power		Height		Width		Depth		Net Weight	
			240 V	208 V	cm	in	cm	in	cm	in	kg	lb
ADAGIO ②	7641-C14	BB	*600-1 400 W		72	23 3/8	34	13 3/8	10	4	7,1	15,6
*Convection (600 W); Fan-forced heat (800 W).					With bars		36	14 1/4	17	6 3/4	8,4	18,6

Depth includes the mounting brackets.

② Compatible with the Programmer pilot-wire system (see technical specifications for catalogue number 7392).

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor in accordance with national and local codes. Consult convectair.com to find the most recent installation instructions for our heaters.

