

UQVMPMXGD



Ultra Low Loss (ULL) OM5 MPO12 (Unpinned) to MPO12 (Pinned), Fiber Extension Cable Assembly, 12-Fiber, Plenum

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand Europe Latin America Middle East /Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber array cable assembly |
| Product Brand | SYSTIMAX ULL |
| Ordering Note | For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration |

General Specifications

| | |
|-------------------------------------|-------------------------|
| Color, boot A | Black |
| Color, boot B | Black |
| Color, connector A | Lime green |
| Color, connector B | Lime green |
| Construction Type | Stranded |
| Fibers per Subunit, quantity | 12 |
| Furcation Color | Lime green |
| Interface, Connector A | MPO-12/UPC |
| Interface, Connector B | MPO-12/UPC |
| Jacket Color | Lime green |
| Polarity | Method B Enhanced (ULL) |
| Total Fibers, quantity | 12 |

Dimensions


| | |
|------------------------|-------|
| Breakout Length | 33 in |
|------------------------|-------|

UQVMPMXGD

Cable Assembly Length Range (m) 1 – 305

Cable Assembly Length Range (ft) 1 – 999

Ordering Tree

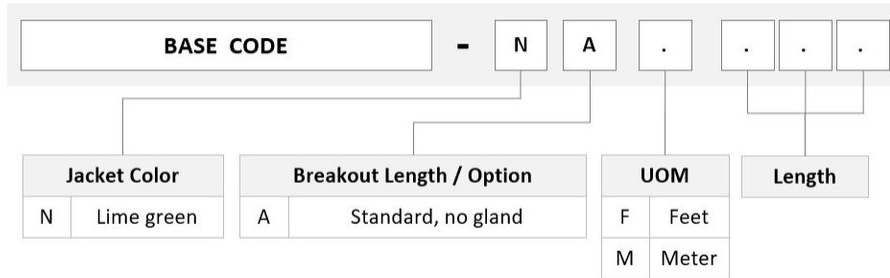

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant/Exempted |



Included Products

760216523 – LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12

UQVMPMXGD

| | |
|-------------------|---|
| P-012-MP-5G-F30LM | fiber |
| 860617232 | - MPO12, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm |
| 860617240 | - MPO12, ULTRA LOW LOSS, MALE, OM5, LIME, 3mm |