


8736SDO2V02S

NEMA Starter, Type S, reversing, horizontal, Size 2, 45A, 25 HP at 575 VAC, 5 kA SSCR, 3 phase, 3 pole, melting alloy overload, 120 VAC coil, open

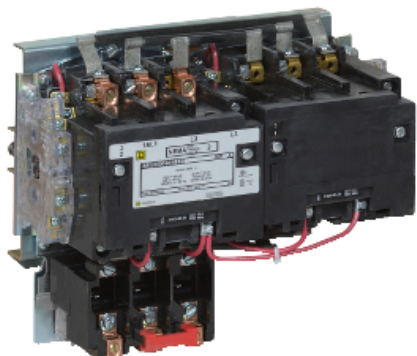

Principal

Product Type	Starter
Product Range	S
Starter Type	Réversible

Complémentaire

NEMA Size	2
Rated Current	45 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 fils
Maximum Voltage Rating	600 V AC
Phase	3 phases
Type of Overload	Melting alloy 3
Horsepower Rating	10 HP at 200 V AC 15 HP at 230 V AC 25 HP at 460 V AC 25 HP at 575 V AC
SCCR	Disjoncteur: 5 kA at 600 V AC Fusible: 5 kA at 600 V AC
Coil Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Control Circuit Type	Separate control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Borniers à vis-étrier

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Height	215,90 mm
Width	228,60 mm
Depth	153,16 mm

Environnement

Enclosure Type	Not rated (open device)
Certifications	Listé UL CSA

Emballage

Poids de l'emballage (Kg)	7,171 kg
Hauteur de l'emballage 1	21,590 cm
Largeur de l'emballage 1	28,702 cm
Longueur de l'emballage 1	35,560 cm

Offre de la durabilité

Directive RoHS UE	Non conforme
Régulation RoHS Chine	Déclaration RoHS pour la Chine Produit en dehors du périmètre RoHS pour la Chine. Déclaration relative aux substances pour votre information.

Garantie contractuelle

Garantie	18 months
----------	-----------