

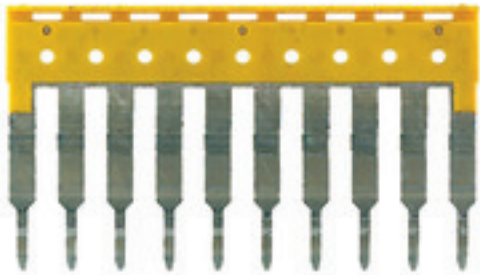
**ZQV 2.5/10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

Version	Accessories, Cross-connector, 24 A
Order No.	<a href="#">1608940000</a>
Type	ZQV 2.5/10
GTIN (EAN)	4008 190099060
Qty.	20 pièce(s)

## ZQV 2.5/10

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Caractéristiques techniques

### Dimensions and weights

Depth	27,6 mm	Depth (inches)	1,087 inch
Height	49,3 mm	Height (inches)	1,941 inch
Width	2,8 mm	Width (inches)	0,11 inch
Net weight	6,724 g		

### Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

### Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

### System specifications

Version	For the terminals
---------	-------------------

### Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Type of fixing	Plugged		

### Cross-connector

Number of cross-connected terminals	10	Rated current, 2-pole	24 A
Rated current, multi-pole	24 A	Type	Cross-connector

### Dimensions

Pitch in mm (P)	5,1 mm
-----------------	--------

### General

Installation advice	Direct mounting	Number of poles	10
---------------------	-----------------	-----------------	----

### Rating data

Rated current	24 A
---------------	------

### Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40
ECLASS 12.0	27-14-11-40	ECLASS 13.0	27-25-03-03
ECLASS 14.0	27-25-03-03		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Date de création 26 novembre 2024 13:15:32 CET

Niveau du catalogue 26.11.2024 / Toutes modifications techniques réservées

## ZQV 2.5/10

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Caractéristiques techniques

### Important note

Product information Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used

### Approvals

ROHS Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">Confirmation of Standards EN 45545-2_2020-10</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Operating instructions_ZDU1.5-ZDU35_ZQV.pdf</a> <a href="#">StorageConditionsTerminalBlocks</a> <a href="#">User Manual ZQV 2.5</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	