


THM WO VIN 25.4/31.8 WS**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

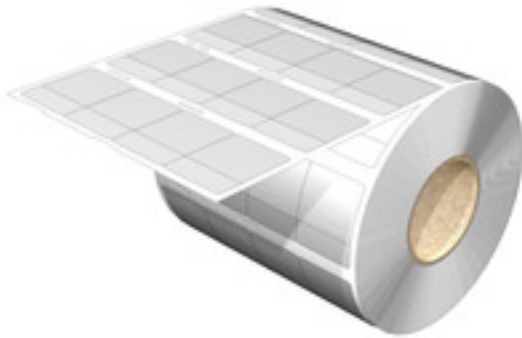

THM WriteOn cable markers on reels are used for labeling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

General ordering data

| | |
|--------------------|---|
| Version | THM, Conductor and cable markers, 3 - 7 mm, 25.4 x 31.8 mm, white |
| Order No. | 2657140000 |
| Type | THM WO VIN 25.4/31.8 WS |
| GTIN (EAN) | 4050118675276 |
| Qty. | 2 000 pièce(s) |
| compatible printer | 2599430000 2599440000 |

THM WO VIN 25.4/31.8 WS

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 0,07 mm | Depth (inches) | 0,003 inch |
| Height | 25,4 mm | Height (inches) | 1 inch |
| Width | 31,8 mm | Width (inches) | 1,252 inch |
| Net weight | 0,117 g | | |

Temperatures

| | |
|-----------------------------|-------------|
| Operating temperature range | -40...80 °C |
|-----------------------------|-------------|

General data

| | | |
|--------------------------------------|--|------------|
| Adhesive | Polyacrylate adhesive | |
| Approval acc. to UL 969 | No | |
| Colour | white | |
| Halogen | Yes | |
| Material | Vinyl film | |
| Number of markers per combination | 1 Label reel = Conductor and cable markers | |
| Number of markers per packaging unit | Form of supply | Label reel |
| Number per roll | 2 000 | |
| Operating temperature range | -40...80 °C | |
| Operating temperature range, max. | 80 °C | |
| Operating temperature range, min. | -40 °C | |
| Printing method | Thermal transfer | |
| Type of printing | neutral | |
| UL 94 flammability rating | V-0 | |
| Width | 31,8 mm | |

Conductor and cable markers

| | | | |
|---|----------|---|--------|
| Conductor O.D. | 3 - 7 mm | Conductor O.D., max. | 7 mm |
| Conductor O.D., min. | 3 mm | Halogen | Yes |
| Wire connection cross section AWG, max. | AWG 10 | Wire connection cross section AWG, min. | AWG 12 |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ETIM 8.0 | EC001530 | ETIM 9.0 | EC001530 |
| ECLASS 9.0 | 27-40-04-01 | ECLASS 9.1 | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |
| ECLASS 12.0 | 27-28-11-02 | ECLASS 13.0 | 27-28-11-02 |
| ECLASS 14.0 | 27-28-11-02 | | |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Fiche de données

THM WO VIN 25.4/31.8 WS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Caractéristiques techniques

Downloads

Catalogues [Catalogues in PDF-format](#)

Fiche de données

THM WO VIN 25.4/31.8 WS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Dessins

