


**THM WO VIN 12.7/38.1 WS****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

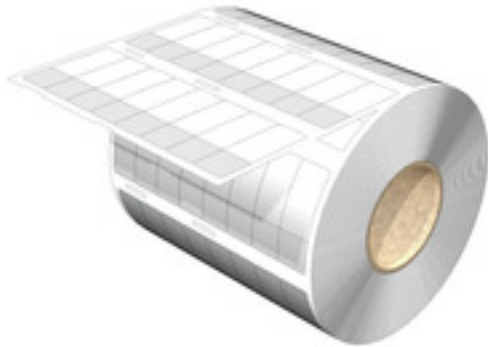

THM WriteOn cable markers on reels are used for labeling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

**General ordering data**

Version	THM, Conductor and cable markers, 4 - 8 mm, 12.7 x 38.1 mm, white
Order No.	<a href="#">2657110000</a>
Type	THM WO VIN 12.7/38.1 WS
GTIN (EAN)	4050118675245
Qty.	10 000 pièce(s)
compatible printer	<a href="#">2599430000</a> <a href="#">2599440000</a>

## THM WO VIN 12.7/38.1 WS

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Caractéristiques techniques

### Dimensions and weights

Depth	0,07 mm	Depth (inches)	0,003 inch
Height	12,7 mm	Height (inches)	0,5 inch
Width	38,1 mm	Width (inches)	1,5 inch
Net weight	0,111 g		

### Temperatures

Operating temperature range	-40...80 °C
-----------------------------	-------------

### General data

Adhesive	Polyacrylate adhesive		
Approval acc. to UL 969	No		
Colour	white		
Halogen	Yes		
Material	Vinyl film		
Number of markers per combination	1 Label reel = Conductor and cable markers		
Number of markers per packaging unit	Form of supply	Label reel	
Number per roll	10 000		
Operating temperature range	-40...80 °C		
Operating temperature range, max.	80 °C		
Operating temperature range, min.	-40 °C		
Printing method	Thermal transfer		
Type of printing	neutral		
UL 94 flammability rating	V-0		
Width	38,1 mm		

### Conductor and cable markers

Conductor O.D.	4 - 8 mm	Conductor O.D., max.	8 mm
Conductor O.D., min.	4 mm	Halogen	Yes
Wire connection cross section AWG, max.	AWG 6	Wire connection cross section AWG, min.	AWG 10

### Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ETIM 8.0	EC001530	ETIM 9.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02
ECLASS 12.0	27-28-11-02	ECLASS 13.0	27-28-11-02
ECLASS 14.0	27-28-11-02		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Approvals

ROHS	Conform
------	---------

**Fiche de données**

**THM WO VIN 12.7/38.1 WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Caractéristiques techniques**

**Downloads**

Catalogues

[Catalogues in PDF-format](#)

**Fiche de données**

**THM WO VIN 12.7/38.1 WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Dessins**

