


**HBT 6,0 - 4,6 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

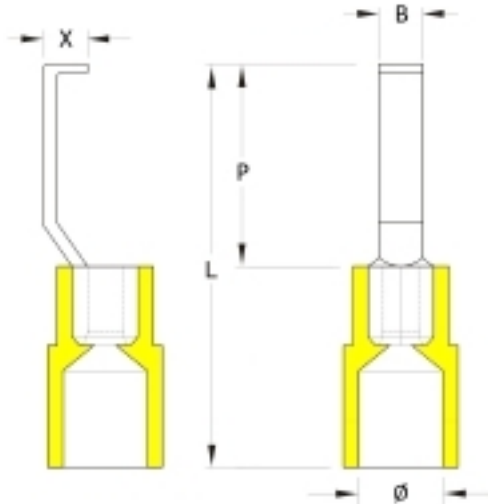

The use of insulated connectors guarantees users a permanent and consistent quality for their electrical connections.

In addition, they bring advantages during installation.

**General ordering data**

Version	cable lug, terminal end, Insulated cable connector, 4 mm <sup>2</sup> - 6 mm <sup>2</sup> , yellow
Order No.	<a href="#">1216230000</a>
Type	HBT 6,0 - 4,6 GE
GTIN (EAN)	4050118000337
Qty.	100 pièce(s)

## HBT 6,0 - 4,6 GE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Caractéristiques techniques

### Dimensions and weights

Net weight	1,8 g
------------	-------

### Technical data

Description of article	isolated hook-blade cable lug
------------------------	-------------------------------

### Connectors

Conductor cross-section, max.	6 mm <sup>2</sup>	Conductor cross-section, min.	4 mm <sup>2</sup>
Identification colour	yellow	Insulation	Available
Material/plastic	PC		

### Dimensions

Hook nose X	2,8 mm	Insulation cross-section	6,4
Length L	30,2 mm	Pin length P	17,2 mm
Pin width B	4,6 mm		

### Classifications

ETIM 6.0	EC001059	ETIM 7.0	EC001059
ETIM 8.0	EC001059	ETIM 9.0	EC001059
ECLASS 9.0	27-40-02-92	ECLASS 9.1	27-40-02-12
ECLASS 10.0	27-40-02-92	ECLASS 11.0	27-40-02-92
ECLASS 12.0	27-40-02-92	ECLASS 13.0	27-40-02-92
ECLASS 14.0	27-40-02-92		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Approvals

ROHS	Conform
------	---------

### Downloads

Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	