



Principal

| | |
|----------------------|---------------------------------|
| Marketing Trade Name | QO |
| Product | Load Center |
| Cover Type | Combination flush/surface cover |

Complémentaire

| | |
|--|-----------------------|
| Tightening Torque | Cover: 20 lb.in |
| Load Center Type | Disjoncteur principal |
| Rated Current | 150 A |
| Number of Spaces | 32 |
| Max Short Circuit Current Rating | 22 kA |
| Maximum Number of Single Pole Circuits | 53 |
| Number of Phases | Monophasé |
| Voltage Rating | 240 V AC |
| Height | 661 mm |
| Width | 362 mm |
| Depth | 95 mm |

Environnement

| | |
|---------------------------------------|-------------------|
| Enclosure Rating | NEMA 1 for indoor |
| Ambient Air Temperature for Operation | -5 °C 40 °C |
| Product Certifications | CSA |


Emballage

| | |
|---------------------------|-----------|
| Poids de l'emballage (Kg) | 11,340 kg |
|---------------------------|-----------|

Offre de la durabilité

| | |
|-------------------------------------|---|
| Directive RoHS UE | Conforme Déclaration RoHS UE |
| Sans métaux lourds toxiques | Oui |
| Sans mercure | Oui |
| Information sur les exemptions RoHS | Oui |
| Régulation RoHS Chine | Déclaration RoHS pour la Chine Déclaration pro-active RoHS pour la Chine (en dehors du périmètre légal RoHS pour la Chine) |

Dimensions

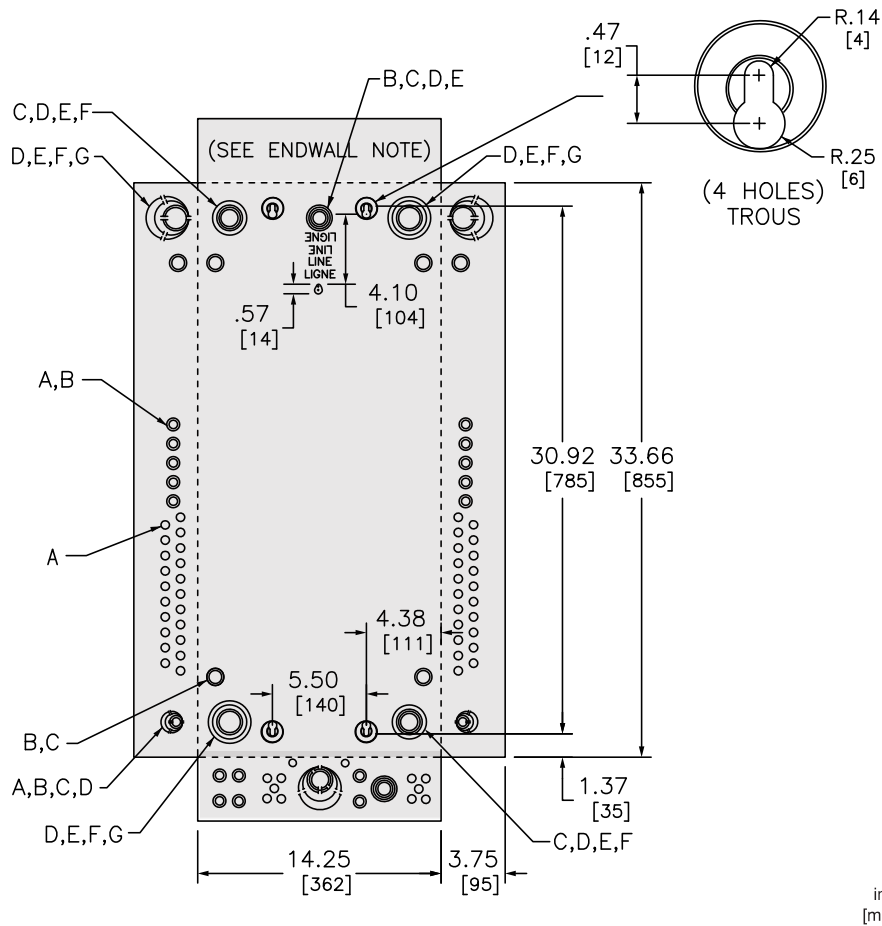


in
[mm]

NOTE: MAIN LUG
USE THIS ENDWALL
REMARQUE: COSSE PRINCIPAL
UTILISER CE SCHEMA

NOTE: MAIN BREAKER
USE THIS ENDWALL
REMARQUE: DISJONCTEUR PRINCIPAL
UTILISER CE SCHEMA

| SYMBOL SYMBOLE | CONDUIT SIZE CONDUIT TAILLE | |
|-------------------|--------------------------------|----|
| | IN | MM |
| A | .50 | 13 |
| B | .75 | 19 |
| C | 1.00 | 25 |
| D | 1.25 | 32 |
| E | 1.50 | 38 |
| F | 2.00 | 51 |
| G | 2.50 | 64 |

Schéma électrique

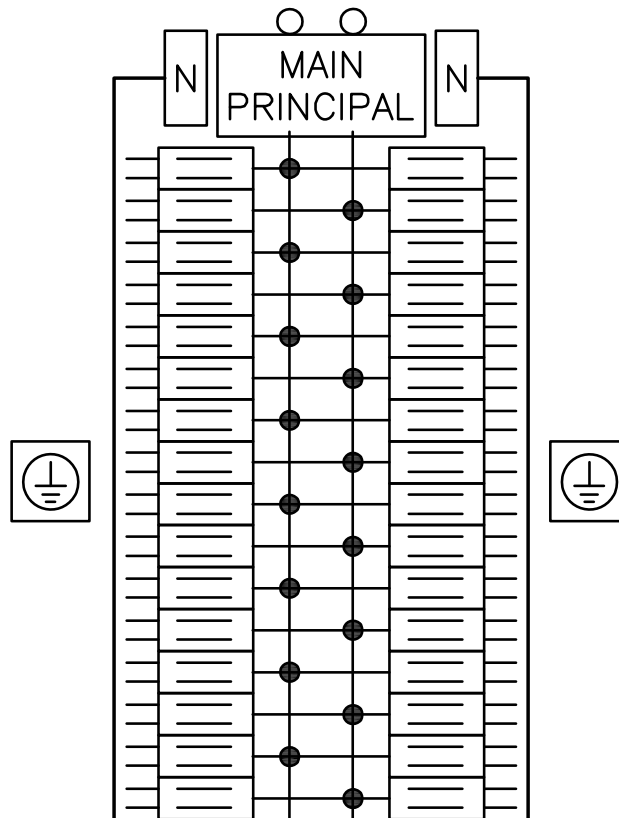

CQO132M200PC
CQO132M150PC