

TeraSPEED® Indoor/Outdoor Plenum Distribution Cable, interlocking aluminum armored with plenum jacket, 24 fiber single-unit

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber indoor/outdoor cable |


General Specifications

| | |
|-----------------------------|-----------------------|
| Armor Type | Interlocking aluminum |
| Cable Type | Distribution |
| Construction Type | Armored |
| Fiber Type, quantity | 24 |
| Jacket Color | Black |
| Total Fiber Count | 24 |

Dimensions

| | |
|-----------------------------|---------------------|
| Diameter Over Armor | 13.34 mm 0.525 in |
| Diameter Over Jacket | 15.4 mm 0.606 in |

Representative Image

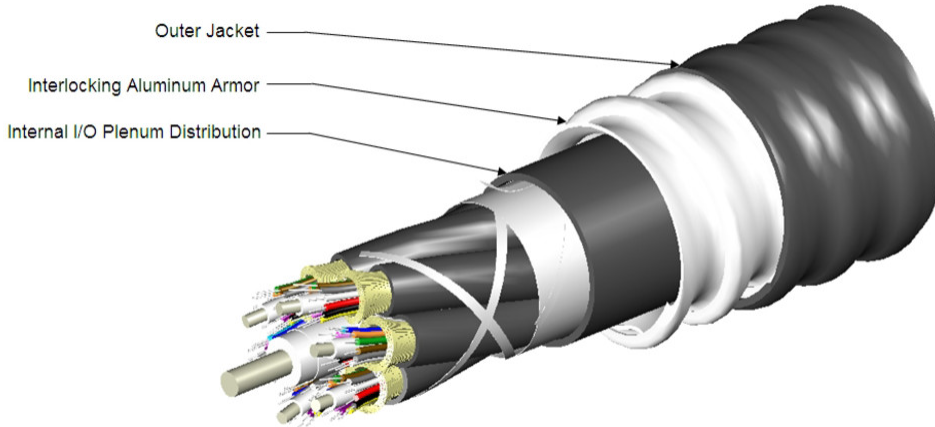

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 231 mm 9.094 in |
| Minimum Bend Radius, unloaded | 154 mm 6.063 in |
| Tensile Load, long term, maximum | 400 N 89.924 lbf |
| Tensile Load, short term, maximum | 1335 N 300.12 lbf |
| Compression | 85 N/mm 485.363 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 25 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 35 N-m 309.776 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 187 m 613.517 ft |

Optical Specifications

| | |
|-------------------|--|
| Fiber Type | G.652.D and G.657.A1 , TeraSPEED® G.652.D and G.657.A1, TeraSPEED® |
|-------------------|--|

Environmental Specifications

760134932 | P-024-OZ-8W-FSUBK

| | |
|--------------------------------------|---|
| Installation temperature | -30 °C to +70 °C (-22 °F to +158 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +75 °C (-40 °F to +167 °F) |
| Cable Qualification Standards | ANSI/ICEA S-104-696 Telcordia GR-20 (water penetration for internal cable) Telcordia GR-409 |
| Environmental Space | Plenum |
| Flame Test Listing | NEC OFCP (ETL) and c(ETL) |
| Flame Test Method | NFPA 130 NFPA 262 |
| Jacket UV Resistance | UV stabilized |
| Water Penetration | 24 h |
| Water Penetration Test Method | FOTP-82 IEC 60794-1 F5 |

Environmental Test Specifications

| | |
|--------------------------------------|--------------------------------------|
| Cable Freeze Test Method | IEC 60794-1 F15 |
| Heat Age | -40 °C to +85 °C (-40 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -40 °C to +70 °C (-40 °F to +158 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

| | |
|---------------------|----------------------------|
| Cable weight | 218 kg/km 146.489 lb/kft |
|---------------------|----------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |



Included Products

CS-8W-TB – TeraSPEED® Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

