

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

Description

The ATK series is an extruded aluminum track for use with A-Line track fixtures. Available in 2', 4', 6', 8' and 12' nominal length.

Features

Extrusion

Constructed of 0.06" extruded aluminum with 0.045" PVC bus bar support holding 12 gauge round bus bars. Polarity groove is located on face of track to indicate location of grounding conductor.

Mounting

This track is surface mounted using the supplied mounting hardware. Suspended mounting is available with accessories (ordered separately).

Labels

cULus listed.


Electrical

Single circuit power distribution system designed to supply lighting unit flexibly. Single hot and neutral conductors are rated for maximum capacity of 20 Amps (2400 watts per circuit) at 120V. Copper electrical conductors are concealed in thermo-plastic, low-profile track section.

Compatibility

Track system is compatible with all A-Line® and Juno® style track fixtures, accessories and connectors.

Technical Drawings

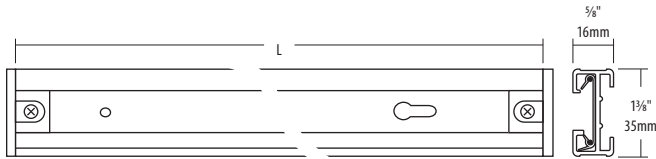


Part No.	Length (Excluding end caps)
ATK02	20 1/8" (511mm)
ATK04	44 1/8" (1121mm)
ATK06	68 1/8" (1730mm)
ATK08	92 1/8" (2340mm)
ATK12'	140 1/8" (3559mm)



SPECIFICATION

Warranty	5 Years
----------	---------

Ordering Guide

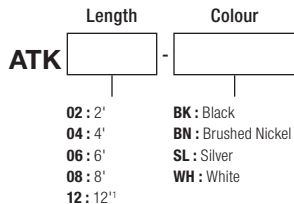


Example: ATK04-BN

Notes:

¹ The 12-foot option is not available in the US. We recommend using an 8-foot section along with a 4-foot section and a joiner to achieve your desired 12-foot run. Accessories should be ordered separately. For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories

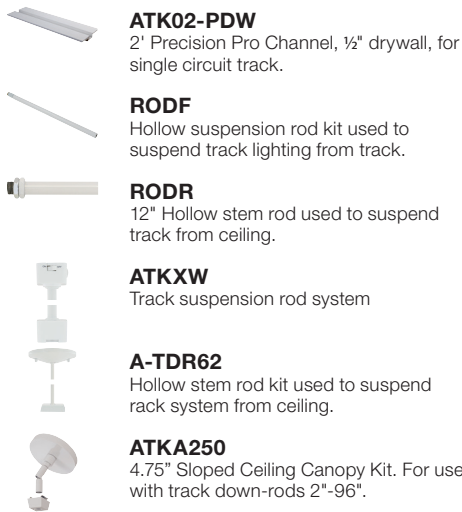

ATK02-PDW
2' Precision Pro Channel, 1/2" drywall, for single circuit track.


RODF
Hollow suspension rod kit used to suspend track lighting from track.

RODR
12" Hollow stem rod used to suspend track from ceiling.

ATKXW
Track suspension rod system

A-TDR62
Hollow stem rod kit used to suspend rack system from ceiling.

ATKA250
4.75" Sloped Ceiling Canopy Kit. For use with track down-rods 2"-96".

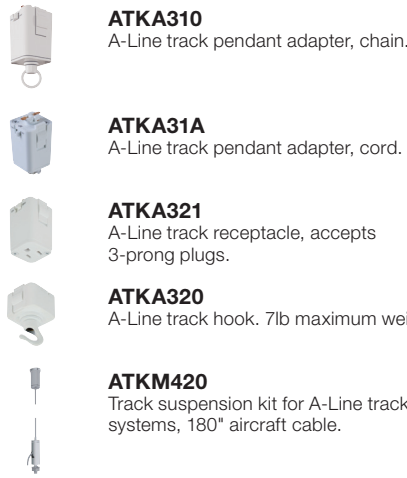


ATKA310
A-Line track pendant adapter, chain.

ATKA31A
A-Line track pendant adapter, cord.

ATKA321
A-Line track receptacle, accepts 3-prong plugs.

ATKA320
A-Line track hook. 7lb maximum weight.

ATKM420
Track suspension kit for A-Line track systems, 180" aircraft cable.

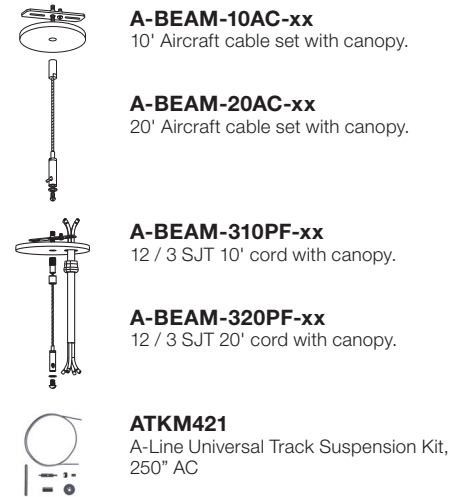

A-BEAM-10AC-xx
10' Aircraft cable set with canopy.


A-BEAM-20AC-xx
20' Aircraft cable set with canopy.

A-BEAM-310PF-xx
12 / 3 SJT 10' cord with canopy.

A-BEAM-320PF-xx
12 / 3 SJT 20' cord with canopy.

ATKM421
A-Line Universal Track Suspension Kit, 250" AC

Connectors & Power Feeds

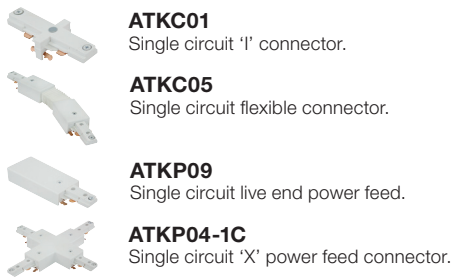


ATKC01
Single circuit 'I' connector.

ATKC05
Single circuit flexible connector.

ATKP09
Single circuit live end power feed.

ATKP04-1C
Single circuit 'X' power feed connector.

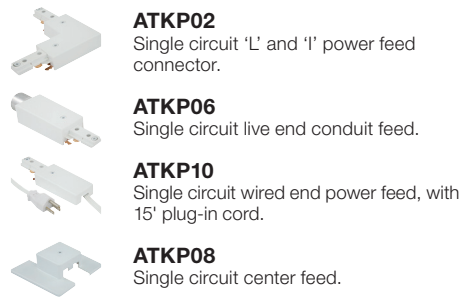


ATPK02
Single circuit 'L' and 'I' power feed connector.

ATPK06
Single circuit live end conduit feed.

ATPK10
Single circuit wired end power feed, with 15' plug-in cord.

ATPK08
Single circuit center feed.

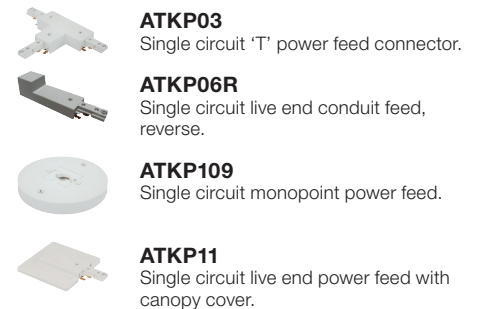

ATPK03
Single circuit 'T' power feed connector.

ATPK06R
Single circuit live end conduit feed, reverse.

ATPK109
Single circuit monopoint power feed.

ATPK11
Single circuit live end power feed with canopy cover.

Compatible LED Track Fixtures



APOLLO LED

ATF7250

ATF7415

SORA LED

ATLAS

FOCUS (ATF8010)



ATF7425

ATF7509

ATF7545

TEARDROP

DELTA



Flight (ATF7607)


Flight (ATF7610)

ATF7630


DINE (T-LEDDNG)

FLEX


Current Limiters



ATKPCL-06-1C
Single circuit live end narrow current limiter, 1-14 amp options



ATKPCL-09-1C
Single circuit dual live end canopy current limiter, 1-14 amp options



ATKPCL-11-1C
Single circuit live end canopy current limiter, 1-14 amp options