

Grounding


GRADIENT MATS & STAPLES



Gradient Control Mat

- Hot dip galvanized, used at switch position in sub-stations.
- Made from 6" x 6" welded mesh 1/4" diameter with pads for installation of 3 grounding connectors.
- Grounding connectors 2/0 AWG-250 MCM included in Cat.No. 6466 GCC x 3 pieces.

Cat. No.	Size	Std.Pkg.	Frame	Wt.-lbs./ each
6466GCM	6" x 4"	1	3/4 x 3/4	35
6466GCC	6" x 4"	1	3/4 x 3/4 c/w conn x 3 pcs.	37
6466GCM1	6" x 4"	1	3/4 x 3/4 (No Connector Pads)	35
6466GCM3	6" x 4"	1	1" x 1"	35
6466GCM5	6" x 4"	1	1/4 x 1 1/4 x 1 1/4	35
6466GCM6	6" x 4"	1	1/4 x 1 1/2 x 1 1/2	35

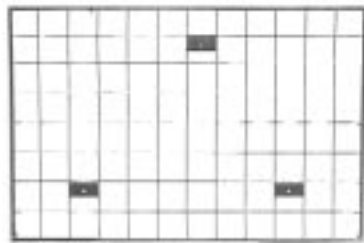

6466GCM



2AWGC

Plastic and Wood Ground Wire Moulding

Cat. No.	Size	Std.Pkg.	Wt.-lbs./ each
701	3/4" plastic moulding in 8' lengths-use # 703 staples	25	2
701W	1/2" wood moulding in 8' lengths	10	2
Staples (Galvanized)			
702	2" staple x 1/2" spread	100	3
703	2" staple x 13/16" spread	50	3
704	3" x 1" spread	50	12
705	3" x 1.1/2" spread	100	8
707	1.1/4" x 3/8" spread	100	1
708	2" x 1 1/16" spread	100	3
709	3" x 1 1/16" spread	100	7
713	3" x 1 3/4" spread	50	8

Other sizes available upon request.



701W



703



707