

Fish Tapes, Lubricants and Accessories

NEW!

Multi-Groove Fiberglass Fish Tapes

**Fiberglass Performance
at 25% Lower Cost!***

- Rigidity for long distance.
- Less surface contact when pushing through crowded conduit.



Fish Tapes

Cat. No.	Length	Size Description	Reel Diameter	Weight
Multi-Groove Fiberglass – 7" Spiral Leader				
56055	100'	100' L x 3/16"W (7" leader)	13" (330 mm)	3.03 lbs. (1.37 kg)
56056	200'	200' L x 3/16"W (7" leader)	17" (432 mm)	6.16 lbs. (2.79 kg)
Multi-Groove Fiberglass – Non-Conductive				
56057	50'	50' L x 3/16"W	13" (330 mm)	2.33 lbs. (1.05 kg)
56058	100'	100' L x 3/16"W	13" (330 mm)	3.05 lbs. (1.38 kg)
56059	200'	200' L x 3/16"W	17" (432 mm)	6.04 lbs. (2.74 kg)
Laser Etched – Stainless Steel for Corrosion Resistance				
56007	125'	125' L x 1/8" W x .062" H (38 m L x 3 mm W x 1.5 mm H)	13" (330 mm)	4.7 lbs. (2.13 kg)
56008	240'	240' L x 1/8" W x .062" H (73 m L x 3 mm W x 1.5 mm H)	13" (330 mm)	7.5 lbs. (3.40 kg)
Laser Etched – Flat Steel				
56000	25'	25' L x 1/8" W x .045" H (7 m L x 3 mm W x 1.1 mm H)	7" (178 mm)	1.0 lbs. (0.45 kg)
56001	50'	50' L x 1/8" W x .045" H (15 m L x 3 mm W x 1.1 mm H)	7" (178 mm)	1.3 lbs. (0.59 kg)
56002	65'	65' L x 1/8" W x .062" H (19 m L x 3 mm W x 1.5 mm H)	9" (229 mm)	2.6 lbs. (1.18 kg)
56003	125'	125' L x 1/8" W x .062" H (38 m L x 3 mm W x 1.5 mm H)	13" (330 mm)	4.7 lbs. (2.13 kg)
56004	240'	240' L x 1/8" W x .062" H (73 m L x 3 mm W x 1.5 mm H)	13" (330 mm)	7.5 lbs. (3.40 kg)
56005	25'	25' L x 1/4" W x .030" H (7 m L x 6.3 mm W x .7 mm H)	7" (178 mm)	1.1 lbs. (0.50 kg)
56006	100'	100' L x 1/4" W x .062" H (30 m L x 6.3 mm W x 1.5 mm H)	13" (330 mm)	6.8 lbs. (3.08 kg)
Spiral Steel				
56013	50'	50' L x 3/16" W (15 m L x 4.8 mm W)	13" (330 mm)	5.1 lbs. (2.31 kg)
Replacement Steel Tapes				
56065	65'	65' L x 1/8" W x .062" H (19 m L x 3 mm W x 1.5 mm H)	–	1.7 lbs. (0.77 kg)
56125	125'	125' L x 1/8" W x .062" H (38 m L x 3 mm W x 1.5 mm H)	–	3.3 lbs. (1.50 kg)
56240	240'	240' L x 1/8" W x .062" H (73 m L x 3 mm W x 1.5 mm H)	–	6.1 lbs. (2.77 kg)
Poly Pull Line				
56108	500'	1-qt. container with orange tracer 210 lbs. average breaking strength	N/A	1 lbs. (0.45 kg)
56110	6500'	5 gal. bucket with orange tracer 210 lbs. average breaking strength	N/A	11 lbs. (4.9 kg)

Multi-Groove Fiberglass




7" Spiral Leader



Non-Conductive

eyelet tip offers added protection against shock from energized sources.

Stainless / Flat Steel



Laser Etched Markings

in 1 foot increments allow you to more accurately measure the depth of conduit runs and determine the amount of tape left to pay out.

NEW! Foam Wire Pulling Lubricant

NO DRIPS! NO STAINS! NO MESS!

4X Greater Yield than gels/waxes*




- Foam lubricant is applied directly into the conduit. No need to pre-coat wires.
- No mess formula stays where it is applied, even in vertical conduit!
- Dissolves clean from hands and clothing.

*One can equals one gallon or 4 quarts of wax/gel lubricants. Based on job site pulls with foam in 3/4" conduit when used as directed.

WARNING: Do not use wet product on live circuits. Compound is electrically conductive before it dries.

WARNING: Contents under pressure. Do not expose container to direct sunlight or temperatures above 120°F. Do not transport or store near heat sources. Keep cans dry and away from sources of ignition. If frozen, gradually warm to room temperature.

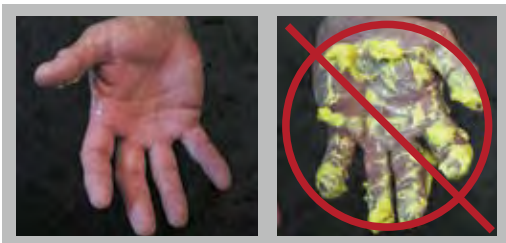

51100

Cat. No.	Net Weight
51100	19 oz