

PanZone® TrueEdge Vertical Wall Mount Enclosure

SPECIFICATIONS

The wall mount enclosures shall mount active equipment vertically in a low profile, on-wall configuration. The enclosure shall be capable of mounting up to 36 in. of active equipment depth and shall have the capability of vertical patching. Equipment brackets shall be adjustable for accommodation of server and/or switch applications. Enclosure shall be engineered to allow proper ventilation for use with various networking equipment including, but not limited to, Power over Ethernet (PoE) Switches and Uninterrupted Power Supplies (UPS). The vertical wall mount enclosure shall have a perforated top and bottom, which can be removed, for optimal airflow, heat dissipation, and equipment access. The optional filter-kit shall provide a NEMA 1 rating.



TECHNICAL INFORMATION

Dimensions:	Part Number	Active RU	Passive RU	Height in. (mm)	Width in. (mm)	Depth in. (mm)	Load Capacity lbs. (kg)
	WME3BL	3 RU	3 RU			9.5 (240)	200 (90)
	WME6BL	6 RU	6 RU	42 (1068)	28.5 (724)	14.7 (374)	300 (136)
	WME9BL	9 RU	9 RU			19.9 (506)	400 (181)

Packaging:	Base, door, horizontal passive equipment brackets, E-rail equipment brackets, locking swing handle, (includes 2 keys), edge grommet, Tak-Ty® hook and loop cable ties, door hinges
Material:	Steel, powder coated
Standards:	IP20; UL 2416
Filter-kit:	Easy to retrofit on an existing TrueEdge enclosure. The filter-kit provides a foam filter that wraps and covers the top perforations of the enclosure. This filter-kit eliminates any excess dust and debris from entering through the top of the enclosure. Filter Kits NEMA 1 rating. Does not change IP rating.

KEY FEATURES AND BENEFITS

Low profile:	Provides an efficient way to deploy switch and server systems in an open architecture environment
Configurable:	Used as a telecommunications room, extension of the telecommunications room, micro data center, or edge deployment. Suggested mounting arrangement within the enclosure should start with the longest depth equipment positioned at the back, progressing from longest to shortest. This allows for easy accessibility, cable management, and better airflow
Thermal capacity:	Perforated top and bottom optimizes airflow for improved dissipation of heat generated from active equipment
Adjustable equipment rails:	Increases usable enclosure depth to 36 in. of available space within the enclosure for active equipment while maintaining the ability to mount patch panels; provides user preferred installation capabilities and a variety of configurations based on application
Removable and secure top cover and bottom plate:	Allows for easy installation and provides secure access to installed equipment

APPLICATIONS

The PanZone TrueEdge Vertical Wall Mount Enclosure provides a comprehensive architecture that allows up to 36 in. of active equipment depth to be mounted in a low-profile application. This lowprofile wall mount enclosure houses traditional horizontal equipment vertically on a wall while minimizing network infrastructure investment to eliminating a rack or cabinet (TR in a BOX and Micro Data Center). The structurally engineered design provides for up to 36 in. of active equipment depth space. It has a premium static load rating with up to 400 pounds and best-in-class thermal ratings to eliminate equipment failure.

- **Scalable** — offering a variety of configurations for servers, switches, and edge computing
- **Strong** — able to withstand optimum load capacity for deployments of server and switch configurations
- **Configurable** — offered in 3 RU active (3 RU passive), 6 RU active (6 RU passive), or 9 RU active (9 RU passive) allowing customization opportunities to fit the needs of the user and deliver storage solutions that make a difference

Vertical Wall Mount Enclosure

3 RU enclosure:	WME3**
6 RU enclosure:	WME6**
9 RU enclosure:	WME9**

Enclosure Accessories

Back panel:	WMEBP
Equipment mounting bracket:	WMEMB
Filter media replacement:	WME^-FR
Filter-kit:	WME^**-FKIT
Vertical 1 RU bracket:	WME0UB
Fiber enclosure adapter bracket:	FEABRU
Active equipment rails:	WME^ERAIL
Horizontal 1 RU bracket:	WME^1RU
Brush pass-through kit:	WMEBR
Ground kit:	WMEGK
DC fan kit:	WMEDCFK
Euro fan kit:	PZAEFK-E
Fan kit:	PZAEFAN

Mini-Com® Patch Panels

Mini-com modular patch panel with labels:	CPPL^WBLY
---	-----------

Panduit UPS and PDU Monitoring Equipment

UPS:	U01N11V, U01N11L
PDU:	P08D09M
PDU security handle:	ACF05, ACF06
PDU security handle temperature and door sensor:	ACF10, ACF11
PDU security handle harness:	ACF20

Panduit Fault Managed Power System

Fault Managed Power System Class 4 Receiver:	PXR1AJD, PXR1AJF
Fault Managed Power System Class 4 Transmitter Chassis:	PXTC1ARA




**Colors: Black (BL) and White (WH)
^Rack Units: 3 RU, 6 RU, and 9 RU
^^Ports: 24 and 48



All listed part numbers are compliant with the U.S. Trade Agreements Act (TAA) for purchases shipped to customers in the United States.

PanZone® TrueEdge Vertical Wall Mount Enclosure

ENGINEERING DRAWINGS

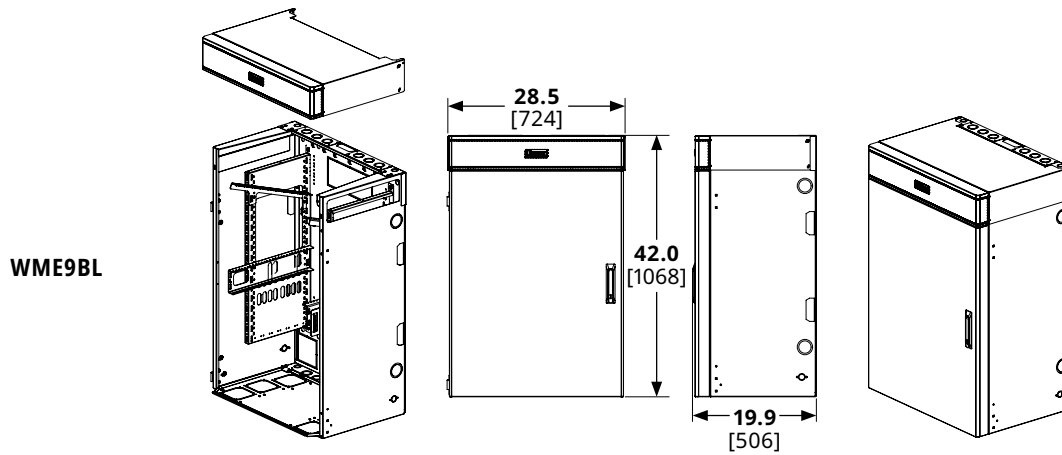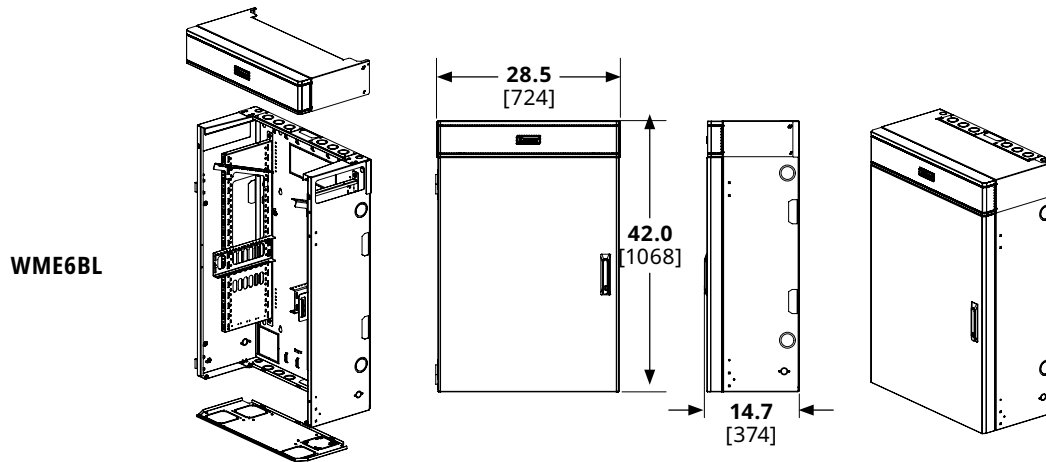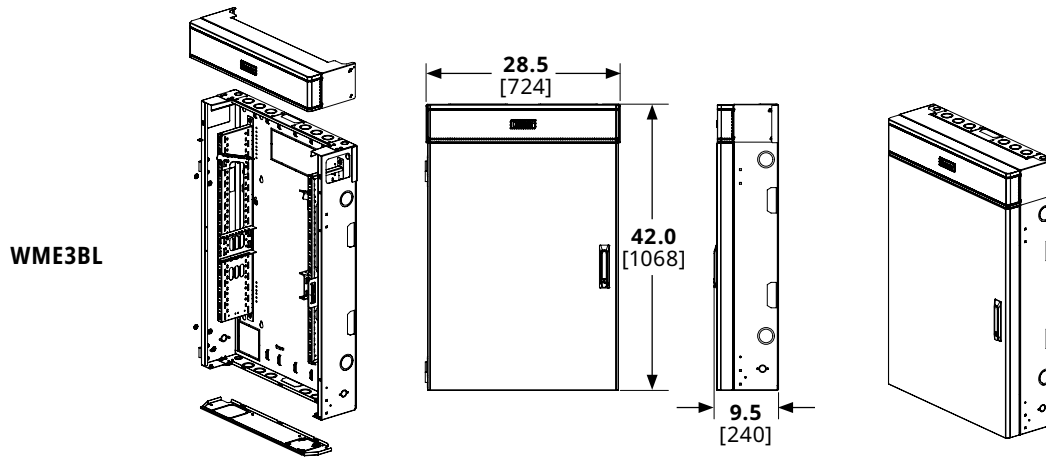

Dimensions are in inches. [Dimensions in brackets are metric].