


Product data sheet

Specifications



High power switching contact block,
Harmony XB4, silver alloy, screw
clamp terminal, 2NC

ZBE504

Main

Range of product	Harmony XB5 Harmony XB4
Product or component type	Contact block
Device short name	ZBE
Sale per indivisible quantity	1
IP degree of protection	IP20 IEC 60529
Contact operation	Slow-break
Contact block type	Double
Contacts usage	High power switching contacts
Connections - terminals	Screw clamp terminals, <= 1 x 2.5 mm² with cable end Screw clamp terminals, <= 2 x 1.5 mm² with cable end Screw clamp terminals, <= 2 x 2.5 mm² without cable end Screw clamp terminals, >= 1 x 0.5 mm² without cable end

Complementary

Product weight	0.071 lb(US) (0.032 kg)
Contacts type and composition	2 NC
Positive opening	With
Mechanical durability	10000000 cycles
Short-circuit protection	10 A cartridge fuse gG IEC 60947-5-1
[Ith] conventional free air thermal current	10 A IEC 60947-5-1
[Ui] rated insulation voltage	300 VIEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV IEC 60947-1
[Ie] rated operational current	1.1 A 125 V, DC-13, P300 IEC 60947-5-1
Mounting of block	Front mounting
Electrical composition code	C15 1)

Environment

Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Vibration resistance	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.654 in (4.200 cm)
Package 1 Width	1.732 in (4.400 cm)
Package 1 Length	1.969 in (5.000 cm)
Package 1 Weight	1.446 oz (41.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	80
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	7.928 lb(US) (3.596 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.4 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.3 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.

Use Better



Materials and Substances

Average percentage of recycled plastic content	23 %
Average percentage of recycled metal content	13 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	98
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

with ZB5AZ009 Fixing Collar




with ZB4BZ009 Fixing Collar



Technical Illustration

Dimensions

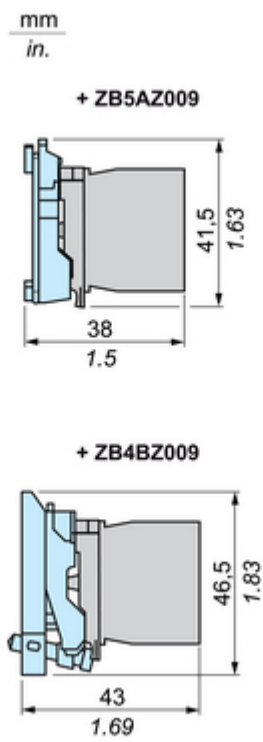

Offer Marketing Illustration

Product benefits / Features

Caractéristiques techniques

Boutons poussoirs en metal Harmony XB4



Offer Marketing Illustration

Product benefits / Features

Bouton poussoir en métal

Harmony XB4



Montage et démontage rapides et faciles



Excellente connexion mécanique avec la tête de commande



Différents types de connexions : borniers à vis-étrier, Push-in, connecteur Faston & broches pour circuit imprimé



Robustesse pour résister aux environnements difficiles



Large choix d'accessoires pour personnaliser vos panneaux

