

Product data sheet

Specifications



Light block, Harmony XB4, Harmony XB5, 22mm, fast on connection, universal LED, 1NO, 12V AC DC

ZBVJ13

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Harmony XB4 Harmony XB5
Product or Component Type	Light block
Device short name	ZBV
Sale per indivisible quantity	5
Connections - terminals	Faston connector IEC 60947-1
Signalling type	Steady
Light source	Universal LED
Bulb base	Integral LED
Light block supply	Direct
Light source colour	White
[Us] rated supply voltage	12 V AC/DC 50/60 Hz

Complementary

Product Weight	0.037 lb(US) (0.017 kg)
Tightening torque	7.08...10.6 lbf.in (0.8...1.2 N.m) IEC 60947-1
Shape of screw head	Cross Philips no 1 Cross pozidriv No 1 Slotted flat Ø 4 mm
Supply voltage limits	10...15 V DC 10.2...13.8 V AC
Current Consumption	15 mA
Service life	100000 h at rated voltage and 25 °C
Surge withstand	1 kV IEC 61000-4-5
Mounting of block	Front mounting
Electrical composition code	M1 M2 M3

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)
IP degree of protection	IP20 IEC 60529

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 60947-5-4 IEC 60947-5-1 CSA C22.2 No 14
Product Certifications	CSA UL Listed
Resistance to fast transients	2 kV IEC 61000-4-4
Resistance to electromagnetic fields	9.1 V/m (10 V/m) IEC 61000-4-3
Resistance to electrostatic discharge	6 kV on contact (on metal parts) IEC 61000-4-2 8 kV in free air (in insulating parts) IEC 61000-4-2
Electromagnetic emission	Class B IEC 55011
[Us] rated supply voltage	12 V

Ordering and shipping details

Category	US10CS222469
Discount Schedule	0CS2
GTIN	3606482228979
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.2 in (5.6 cm)
Package 1 Width	1.8 in (4.5 cm)
Package 1 Length	2.1 in (5.4 cm)
Package weight(Lbs)	0.4 oz (10 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	2.2 in (5.6 cm)
Package 2 Width	1.8 in (4.5 cm)
Package 2 Length	2.1 in (5.4 cm)
Package 2 Weight	2.01 oz (57 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better



Materials and Substances

Average percentage of recycled plastic content	30 %
Average percentage of recycled metal content	10 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Circularity Profile	End of Life Information
Take-back	No


Dimensions Drawings

Dimensions

with ZB5AZ009 Fixing Collar





with ZB4BZ009 Fixing Collar




Technical Illustration

Dimensions

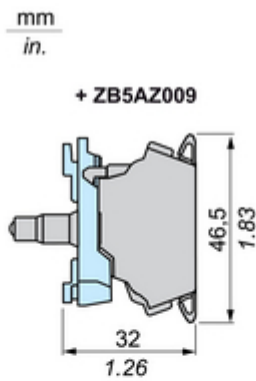

Offer Marketing Illustration

Product benefits / Features

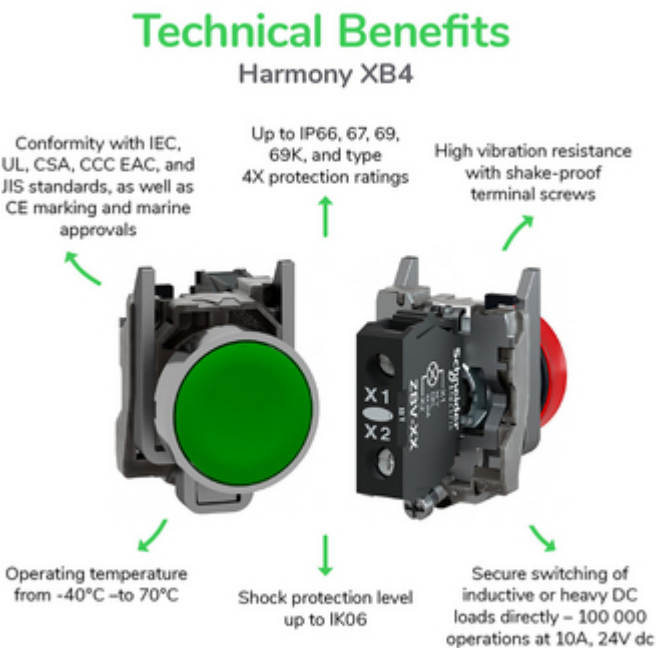

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4



Quick and easy assembly and disassembly



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Excellent mechanical connection with operator head



Large set of accessories to customize your panels



Robustness to withstand harsh environments



Image of product / Alternate images

Alternative



