

# Ordering Information


Sample Number: CRTK-A-A08-E-120-5-SR-A

Product Family	Lumen Package	Driver	Voltage	Distribution
CRTK-A=Caretaker Dusk-to-Dawn Area Luminaire	A08=8 LEDs A12=12 LEDs <sup>1</sup>	E=Non-Dimming	120=120V	5=Type V
Options (Add as Suffix)		Color	Accessories (Order Separately)	
S=Shorting Cap 5=120V NEMA Photocontrol Included 10K=10kV UL 1449 Surge Protection Device UL=UL/CSA Listed SR=Small Acrylic Refractor Included	B18=18" Wood Pole Pipe Arm B24=24" Wood Pole Pipe Arm B30=30" Wood Pole Pipe Arm TH=Tool-less Door Hardware WPBKT=Wall or Wood Pole Mounting Bracket V=(2) 5' #14 Leads 5000=5000K CCT	AP=Grey BZ=Bronze BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White A=Raw Aluminum Unfinished (Standard) <sup>1</sup>	RMARROA5=ANSI/NEMA Standard Refractor Assembly SR-CARETAKER=Small Acrylic Refractor	


NOTE: <sup>1</sup> Paint required for 12 LEDs at 40°C ambient. Maximum ambient temperature for 12 LEDs unpainted is 25°C.

## Dimensions


### Full Cutoff

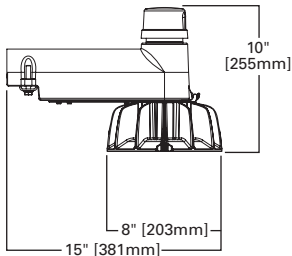

### Small Acrylic Refractor

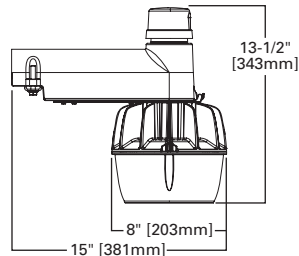


### ANSI/NEMA Standard Refractor Assembly

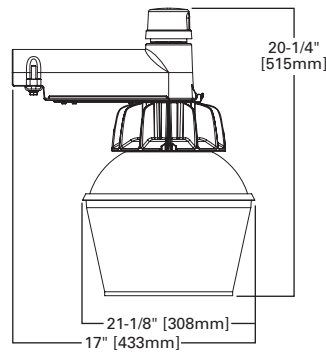

## Optional Wood Pole Pipe Arm

### 18", 24" or 30" Pipe Arm

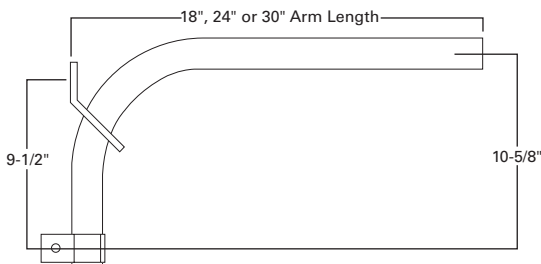

## Power and Lumens

Luminaire Wattage (Nominal)		48W	73W
Type V	Lumens	4,814	6,910
	BUG Rating	2-0-1	3-0-1
Type V with SR	Lumens	4,674	6,630
	BUG Rating	3-3-2	3-3-2

## Lumen Maintenance (8 LEDs)

Ambient Temperature	TM-21 Lumen Maintenance (36,000 Hours)	Theoretical L70 (Hours)
25°C	> 86%	87,000
40°C	> 84%	72,000

## Lumen Maintenance (12 LEDs)

Ambient Temperature	TM-21 Lumen Maintenance (36,000 Hours)	Theoretical L70 (Hours)
25°C	> 83%	69,000
40°C*	> 82%	66,000

\* Painted only.

## Additional Information

Compliances	Technical Data (Electronic LED Driver)	EPA Effective Projected Area (Square Feet)	Shipping Data (Approximate Net Weight)
UL and cUL Wet Location Listed IP66 Rated LED Module 3G Vibration Rated ARRA Compliant DesignLights Consortium® Qualified	>0.9 Power Factor <20% Total Harmonic Distortion 120V 50/60Hz -40°C Minimum Ambient Temperature Rating +25°C Maximum Ambient Temperature Rating	0.67	8.0 lbs. (3.6 kgs.)



NOTE: Specifications and dimensions subject to change without notice.