

SNAP²IT[®] Duplex Connectors

Zinc die-cast. For AC • MCI-A • HCF steel and aluminum cable • Flexible metal conduit steel and aluminum (regular and reduced wall) • MCI cable • Continuous corrugated aluminum • AC90.



3838AST



4040AST

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	CABLE RANGE
3838ST*	10935	3/8	1/2	25	100	1.912	1.738	.970	.620	(2) .405 - .612
3838AST*	36230	3/8	1/2	25	100	1.772	1.605	.840	.620	(2) .405 - .612
4040AST†*	40351	3/8	1/2	25	100	1.772	1.605	.840	.620	(2) .485 - .612

*Provided with insulated throat.

†Provided with insulated throat and red tinted inside clips.


See comparison on page E-1.

SNAP-TITE[®] and SNAP²IT[®] products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information see page 7.

See page E-25 for MCI-A cable ranges.

Concrete tight when taped.

PATENTED.

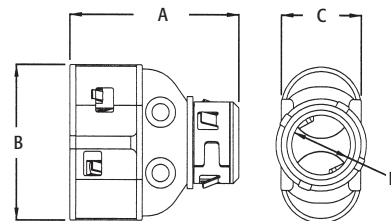

For **EASIER MC/AC INSTALLATIONS** see
383810AST
& **404010AST**
(above)