



Main

| | |
|-------------------------------|----------------------|
| Range of Product | Harmony XB6 |
| Product or Component Type | Complete pilot light |
| Device short name | XB6 |
| Bezel material | Plastic |
| Mounting diameter | 0.63 in (16 mm) |
| Sale per indivisible quantity | 1 |
| Shape of signaling unit head | Round |
| Cap/operator or lens colour | Red |
| Light source | LED |
| Bulb base | Integral LED |
| Light block supply | Direct |
| [Us] rated supply voltage | 12...24 V AC/DC |

Complementary

| | |
|--|---|
| Height | 0.71 in (18 mm) |
| Width | 0.71 in (18 mm) |
| Depth | 2.24 in (57 mm) |
| Terminals description ISO n°1 | (+ -)PL |
| Net Weight | 0.03 lb(US) (0.015 kg) |
| Operating position | Any position |
| Connections - terminals | Faston connectors 2.8 x 0.5 mm |
| [Ui] rated insulation voltage | 250 V 2)IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 4 kV IEC 60947-1 |
| Signalling type | Steady |
| Supply voltage limits | 6...30 V AC/DC |
| Current Consumption | 15 mA |
| Surge withstand | 1 KV direct contact IEC 61000-4-5 2 kV in free air IEC 61000-4-5 |

Environment

| | |
|---------------------------------------|--|
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Electrical shock protection class | Class II IEC 61140 |
| IP degree of protection | IP65 IEC 60529 |
| NEMA degree of protection | NEMA 13 UL 50 NEMA 4 UL 50 NEMA 4X UL 50 NEMA 13 CSA C22.2 No 94 NEMA 4 CSA C22.2 No 94 NEMA 4X CSA C22.2 No 94 |

| | |
|---------------------------------------|---|
| Standards | IEC 60947-5-1 CSA C22.2 No 14 JIS C 852 UL 508 IEC 60947-1 JIS C8201-5-1 IEC 60947-5-5 JIS C8201-1 |
| Product Certifications | GOST[RETURN]CSA[RETURN]CCC[RETURN]JUL |
| Vibration resistance | +/- 3 mm 2...500 Hz)IEC 60068-2-6 5 gn 2...500 Hz)IEC 60068-2-6 |
| Shock resistance | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27 |
| Resistance to fast transients | 2 kV IEC 61000-4-4 |
| Resistance to electromagnetic fields | 9.14 V/m (10 V/m) IEC 61000-4-3 |
| Resistance to electrostatic discharge | 6 KV on contact (on metal parts) IEC 61000-4-2 8 kV in free air (in insulating parts) IEC 61000-4-2 |
| Electromagnetic emission | Class B IEC 55011 |

Ordering and shipping details

| | |
|-------------------|-------------------------|
| Category | 22459-PUSHBUTTONS, 16MM |
| Discount Schedule | CS2 |
| GTIN | 3389110764499 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------------|--------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 0.79 in (2.0 cm) |
| Package 1 Width | 4.33 in (11.0 cm) |
| Package 1 Length | 6.30 in (16.0 cm) |
| Package 1 Weight | 0.39 oz (11.0 g) |
| Unit Type of Package 2 | S01 |
| Number of Units in Package 2 | 60 |
| Package 2 Height | 5.91 in (15.0 cm) |
| Package 2 Width | 5.91 in (15.0 cm) |
| Package 2 Length | 15.75 in (40.0 cm) |
| Package 2 Weight | 29.28 oz (830.0 g) |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Circular Head Pilot Light

Dimensions

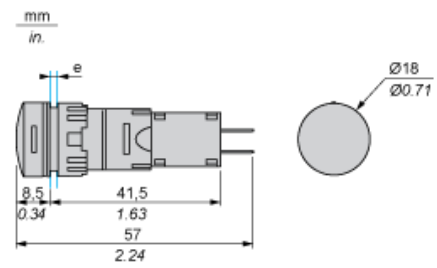

e panel thickness 1 to 6 mm/0.03 to 0.23 in.

Panel Cut-out

For Square or Circular Head

