


ORDERING INFORMATION

Order code: 63627
 Description: E232T8PS120-277/N/AS
 UPC: 69549636279

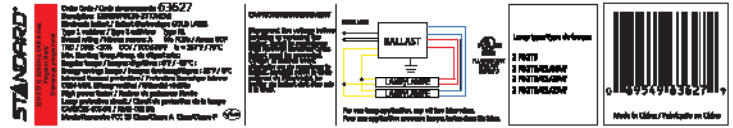

SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Program Start	Contains PCBs:	No
Lamp connection:	Parallel	Sound rating:	A
Input voltage (V):	120-277 V	Open current voltage (OCV) (V):	550
Input frequency (Hz):	50/60HZ	Inherent thermal protection:	Yes
Max. case temperature:	75 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A GDLE
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F32T8 (32W)	2	32	0/-18	0.46	55	0.88	10	0.99	1.7	1.61
F32T8/ES (30W)	2	30	32/0	0.45	54	0.93	10	0.99	1.7	1.72
F32T8/ES (28W)	2	28	32/0	0.40	48	0.90	10	0.99	1.7	1.88
F32T8/ES (25W)	2	25	32/0	0.37	44	0.87	10	0.99	1.7	1.98
F17T8 (17W)	2	17	0/-18	0.26	31	0.95	10	0.99	1.7	3.06
F25T8 (25W)	2	25	0/-18	0.37	44	0.90	10	0.99	1.7	2.05
F32T8 (32W)	1	32	0/-18	0.28	34	1.06	10	0.99	1.7	3.12
F32T8/ES (30W)	1	30	32/0	0.28	33	1.08	10	0.99	1.7	3.27
F32T8/ES (28W)	1	28	32/0	0.26	31	1.05	10	0.99	1.7	3.39
F32T8/ES (25W)	1	25	32/0	0.23	27	1.05	10	0.99	1.7	3.89
F25T8 (25W)	1	25	0/-18	0.23	28	1.13	10	0.99	1.7	4.04
F40T8 (40W)	1	40	0/-18	0.35	42	1.03	10	0.99	1.7	2.45
F17T8 (17W)	1	17	0/-18	0.17	20	1.45	10	0.99	1.7	7.25

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. March 9, 2015


ORDERING INFORMATION

Order code: 63627

Description: E232T8PS120-277/N/AS

UPC: 69549636279

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
277 VOLTS										
F32T8 (32W)	2	32	0/-18	0.24	54.6	0.88	10	0.98	1.7	1.61
F32T8/ES (30W)	2	30	32/0	0.20	54	0.93	10	0.98	1.7	1.72
F32T8/ES (28W)	2	28	32/0	0.18	48	0.90	10	0.98	1.7	1.88
F32T8/ES (25W)	2	25	32/0	0.16	44	0.87	15	0.98	1.7	1.98
F17T8 (17W)	2	17	0/-18	0.11	31	0.95	15	0.97	1.7	3.06
F25T8 (25W)	2	25	0/-18	0.16	44	0.90	15	0.98	1.7	2.05
F32T8 (32W)	1	32	0/-18	0.12	34	1.06	15	0.97	1.7	3.12
F32T8/ES (30W)	1	30	32/0	0.12	33	1.08	15	0.97	1.7	3.27
F32T8/ES (28W)	1	28	32/0	0.11	31	1.05	15	0.97	1.7	3.39
F32T8/ES (25W)	1	25	32/0	0.10	27	1.05	25	0.95	1.7	3.89
F25T8 (25W)	1	25	0/-18	0.10	28	1.13	25	0.95	1.7	4.04
F40T8 (40W)	1	40	0/-18	0.15	42	1.03	15	0.98	1.7	2.45
F17T8 (17W)	1	17	0/-18	0.07	19	1.45	30	0.95	1.7	7.63

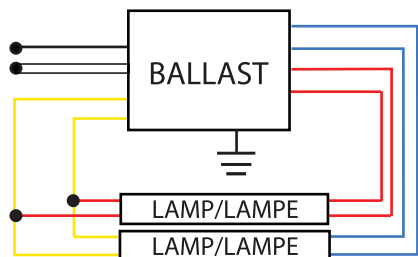


LEADS LENGTH

Black	18.8"	(48.00 cm)
White	18.8"	(48.00 cm)
Blue	30.9"	(78.50 cm)
Red	30.9"	(78.50 cm)
Yellow	46.6"	(118.00 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.30" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.90" (22.60 cm)

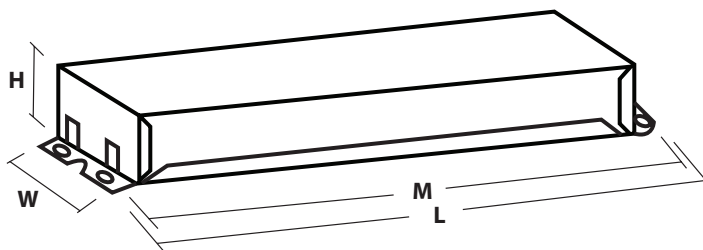

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 9, 2015