



### Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or Component Type	Terminal block
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys GV2 TeSys Deca TeSys K TeSys U

### Complementary

[Ie] rated operational current	63 A
Mounting Location	35 mm DIN rail
IP degree of protection	IP20 conforming to IEC 60529
[Ui] rated insulation voltage	690 V IEC 60947-1
Connections - terminals	Screw clamp terminals 1 solid AWG 4 Screw clamp terminals 1 0.00...0.02 in <sup>2</sup> (1.5...16 mm <sup>2</sup> ) flexible with cable end Screw clamp terminals 1 0.00...0.02 in <sup>2</sup> (1.5...16 mm <sup>2</sup> ) flexible without cable end Screw clamp terminals 1 0.00...0.04 in <sup>2</sup> (1.5...25 mm <sup>2</sup> ) solid Screw clamp terminals 2 0.00...0.01 in <sup>2</sup> (1.5...4 mm <sup>2</sup> ) flexible with cable end Screw clamp terminals 2 0.00...0.01 in <sup>2</sup> (1.5...6 mm <sup>2</sup> ) solid Screw clamp terminals 2 0.00...0.01 in <sup>2</sup> (2.5...4 mm <sup>2</sup> ) flexible without cable end Screw clamp terminals 1 flexible AWG 4
Tightening torque	15.05 Lbf.in (1.7 N.m) screw clamp terminals 19.47 lbf.in (2.2 N.m) connector
Net Weight	0.25 lb(US) (0.115 kg)

### Ordering and shipping details

Category	22367-MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	3389110512946
Returnability	Yes
Country of origin	RO

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.01 in (5.1 cm)
Package 1 Width	4.69 in (11.9 cm)
Package 1 Length	5.98 in (15.2 cm)
Package 1 Weight	4.23 oz (120.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)

Package 2 Weight	10.73 lb(US) (4.866 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	640
Package 3 Height	30.31 in (77.0 cm)
Package 3 Width	31.50 in (80.0 cm)
Package 3 Length	23.62 in (60.0 cm)
Package 3 Weight	189.27 lb(US) (85.85 kg)


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

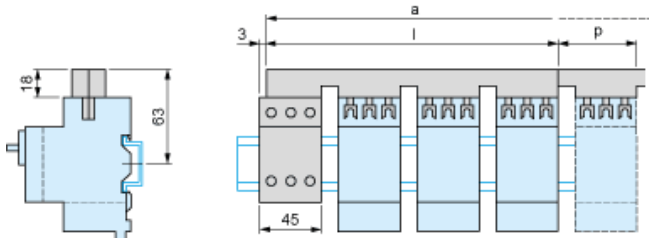

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548