

Technical Information Bulletin

LED Lamps




Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67944
 Description: G9HO/S3/5W/30K/FR/STD
 UPC: 69549679443
 Case quantity: 50 / 200

PHYSICAL DATA

Base: G9
 Shape: JD
 Type: LED General Purpose /
 G9 High Output

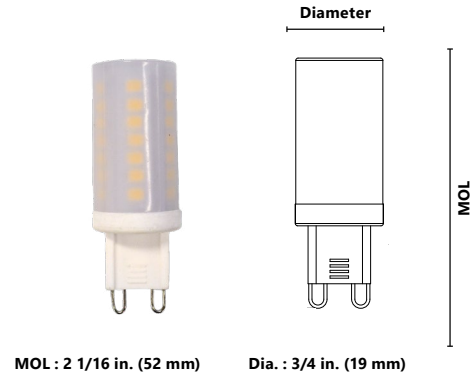

PERFORMANCE DATA

Watts (W): 5
 Volts (VAC): 120
 Colour temperature (K)**: 3 000
 Life L70 (hrs): 50 000
 Initial lumens (lm)*: 430
 Initial lumens per watt (lm/W): 86
 CRI: 80
 Beam angle: 360
 Power factor: 0.9
 Operating temperature range: -20 °C to 40 °C (-4 °F to 104 °F)

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %

COMPATIBLE DIMMERS

Lutron	PD-5NE, DVCL-153P ¹ , CTCL-153P, DVCL-253P, AYCL-253P ² , DVRP-253P-WH, SELV-300P, MACL-153P
Cooper	RRD-6NA-WH, AAL06 ¹ , SLC03P
Leviton	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
Legrand	RH703PTUTC

¹ Flickering at low settings

² Quick flash at start



- Usage in enclosed fixtures or at temperatures above the recommended operating temperature may reduce lamp life.
- Suitable for damp location
- Operating temperature: 20 °C/-4 °F to 40 °C/104 °F
- 3 Years Limited Warranty.
- This device is not intended for use with emergency exit fixtures or lights. For complete warranty and dimmer information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.