



Bolts

THIMBLE & OVAL EYE BOLTS

Thimble Eye Bolts

Complete with square nuts. Hot dip galvanized, cone points. C.S.A. Drawing No. B-7 & B-5

Cat. No.	D	L	T	Std. Pkg.	Wt.-lbs./ C
Straight					
858TE	5/8	8	6	25	125
1058TE	5/8	10	6	25	144
1258TE	5/8	12	6	25	162
1458TE	5/8	14	6	25	198
Bent Thimble Eye Bolts					
1058BTE	5/8	10	6	25	144
1258BTE	5/8	12	6	25	162
1458BTE	5/8	14	6	25	198
1010BTE	1	10	6	10	190



1058TE



1058BTE

Oval Eye Bolts

Hot dip galvanized Bolts 6" and longer have cone points.

Eye Dimensions (A x B) for 1/2" bolt: 1 x 1-1/2"; for 5/8 and 3/4" bolts: 1-1/2 x 2

Cat.No.	Diameter	L	T	Std.Pkg.	Wt.-lbs./ C
6580E	5/8	6	3	50	122
8580E	5/8	8	4	50	136
10580E	5/8	10	4	25	150
12580E	5/8	12	6	25	168
14580E	5/8	14	6	25	186
16580E	5/8	16	6	25	204
18580E	5/8	18	6	25	222
20580E	5/8	20	6	25	250
22580E	5/8	22	6	25	270
24580E	5/8	24	6	25	290
10340E	3/4	10	6	25	225
12340E	3/4	12	6	25	250
14340E	3/4	14	6	25	275
16340E	3/4	16	6	25	295
18340E	3/4	18	6	25	320

Other sizes available upon request.



10580E

Bolts


"U" BOLTS



"U" Bolts

Complete with 4 hexagon nuts. Minimum order quantities required.

Cat. No.	Dimensions-Inches				Minimum Breaking Strength	Std.Pkg.	Weight/100
	Size A-Inches	B	C	D			
6310U	3/8	2 5/8	2 1/16	1	8,000 lbs.	100	35
6320U	3/8	3 1/8	2 5/16	1	8,000 lbs.	100	40
6330U	3/8	4	2 13/16	1 1/2	8,000 lbs.	100	47
6421U	1/2	2 1/2	1 1/2	1 1/4	14,000 lbs.	100	63
6451U	1/2	3	1 1/2	1 1/4	14,000 lbs.	100	71
6461U	1/2	4	2	1 1/2	14,000 lbs.	100	84
6551U	5/8	3	1 1/2	1 3/4	25,000 lbs.	50	122
6552U	5/8	3 5/8	1 3/4	2	25,000 lbs.	50	132
6555U	5/8	4	2	2	25,000 lbs.	50	142
6661U	3/4	4 1/2	3	2 1/2	36,000 lbs.	25	220
6663U	3/4	5 1/2	2 3/8	2 1/2	36,000 lbs.	25	250
6665U	3/4	6	2 3/8	2 1/2	36,000 lbs.	25	295
6750U	7/8	5	2 1/2	2 1/2	50,000 lbs.	15	364
6760U	7/8	6	2 3/4	3	50,000 lbs.	15	405
6770U	7/8	7	3	3	50,000 lbs.	15	446
6850U	1	5	3	2 1/2	66,000 lbs.	10	507
6860U	1	6	3 1/8	3	66,000 lbs.	10	560
6870U	1	7	3 1/4	3	66,000 lbs.	10	613

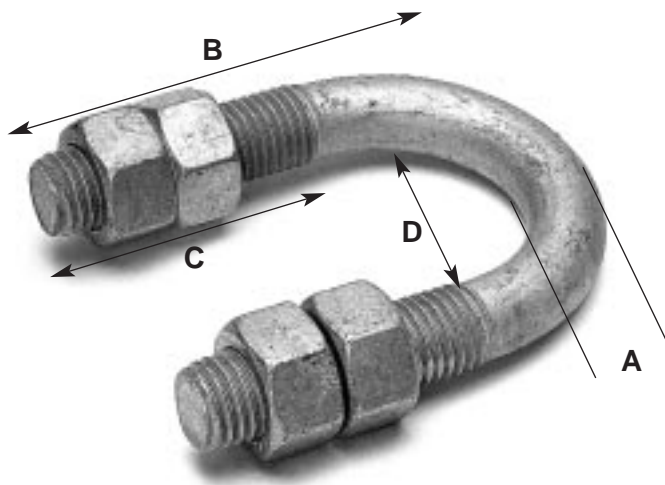

6661U



available in 3/8" or 5/16" diameter