


Quality Performance photo controls

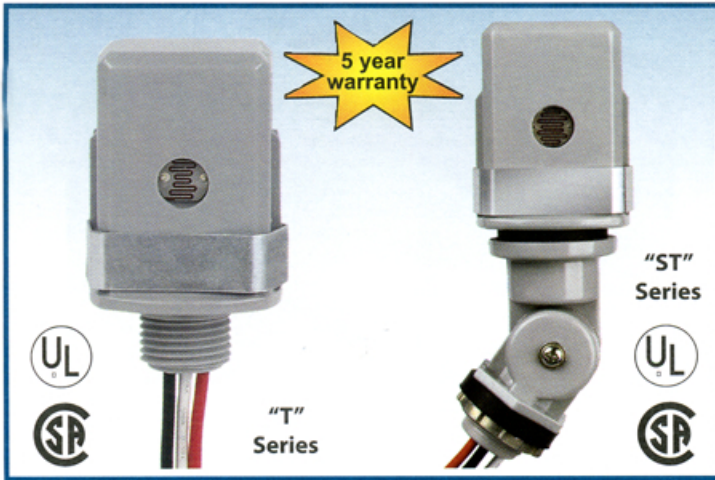

Lumatrol® "T" & "ST" Series Wire-In Photo Controls

| Specifications | |
|-----------------------------|--|
| Housing: | Weatherproof Lexan® housing. |
| Photocell: | 1/2" cadmium sulfide light sensitive element. |
| Turn-on: | 1 to 3 foot-candles. External light level slide allows field adjustment between 3 to 10 foot-candles. |
| Turn-on/ Turn-off Ratio: | 1:3 |
| Switch Type: | Single-pole, single-throw. Contact position at night normally closed. |
| Time Delay: | Minimum 15 seconds. |
| Temperature Range: | -40° to 158°F. |
| Lead Wire: | Moisture proof, color coded lead wire. Wire length: 6 inches. |
| Threaded Stem: | 1/2"-14 thread, and fits 1/2" knock out. Swivel T-Series (ST) is equipped with a swivel mount which allows installer to swivel light sensitive element to the best position for operation. |
| Dimensions: | 2" high, 1-1/2" wide, 1" deep. |
| ST Series: | 2" high, 1-1/2" wide, 1" deep (body); 2" high, (stem). |

| Model | Voltage | Rating |
|-----------------|---------|---------|
| ST-15*, T-15* | 120 | 1800 VA |
| ST168, T-168† | 208-277 | 1800 VA |
| ST-19**, T-19** | 480 | 1800 VA |
| ST-347†** | 347 | 1800 VA |

** Dimensions: 3" high, 2" wide, 1 1/8" deep.

* UL listed & CSA certified. † CSA certified only.



Lumatrol® "A" Series Wire-In Photo Controls

| Specifications | |
|-----------------------------|---|
| Housing: | Durable, high impact Lexan® housing, ultrasonically welded for maximum strength. Nylon locknut provided. Compact in size, A-105 can be mounted directly within a lighting fixture or in lighting standards that are 2 inches in diameter or larger. |
| Photocell: | 1/2" cadmium sulfide light sensitive element. |
| Turn-on: | 1 to 3 foot-candles. |
| Turn-on/ Turn-off Ratio: | 1:3 |
| Switch Type: | Single-pole, single-throw. Contact position at night normally closed. |
| Time Delay: | Minimum 15 seconds. |
| Temperature Range: | -30° to 140° F. |
| Lead Wire: | Color coded lead wire. Wire length: 15 inches. |
| Threaded Stem: | 3/8 inch-18 thread; threaded stem 3/4 inches long. |
| Dimensions: | 2" high, 1-1/4" wide, 3/4" deep (1-1/2" deep including threaded stem). |

Note: The body or housing of Model A-105 must be mounted in a weather proof enclosure to assure protection from water damage. Only threaded portion is weather proof.

| Model | Voltage | Rating |
|-----------|---------|---------|
| A-105* | 120 | 1000 VA |
| A-1068* | 208-277 | 1000 VA |
| A-347† | 347 | 1000 VA |
| A-105W†** | 120 | 1000 VA |
| A-1068W** | 208-277 | 1000 VA |

** Complete with gasketed metal wall plate, mounting screws, and two nylon locknuts so that units will fit any standard outlet box.

* UL Recognized & CSA Certified † CSA Certified only.