

Individual Spec Sheet

THB

TEMPORARY LED HIGH BAY

GEN. 2

ORDERING INFORMATION

Order code: 68701
Model number: THB-DSC-150W-CW
UPC: 069549018303
Case quantity: 4

PHYSICAL DATA

Housing color: Orange
Cage material: Aluminum
Can be daisy chained: Yes: Up to 4 luminaires
Wire specification: 18 AWG/3C
Wire length: 20 ft (6 m)
Mounting: Handle or eyebolt

PERFORMANCE DATA

Watts (W): 150
Volts (VAC): 120
Colour temperature (K)¹: Cool White
Lumen output (lm)²: 17 380
Efficiency (lm/W): 116
CRI: 80+
Life L70 (h)³: 54 000
Beam angle (°): 360
Surge protection (kV): 6
Operating temp. range: -30°C to 60°C (-22°F to 140°F)
Operating position: Universal

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations


This lighting equipment meets requirements of ICES-005 issue 5 for class B products. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Handle is removable to allow for installation of the included eyebolt




DIMENSIONS

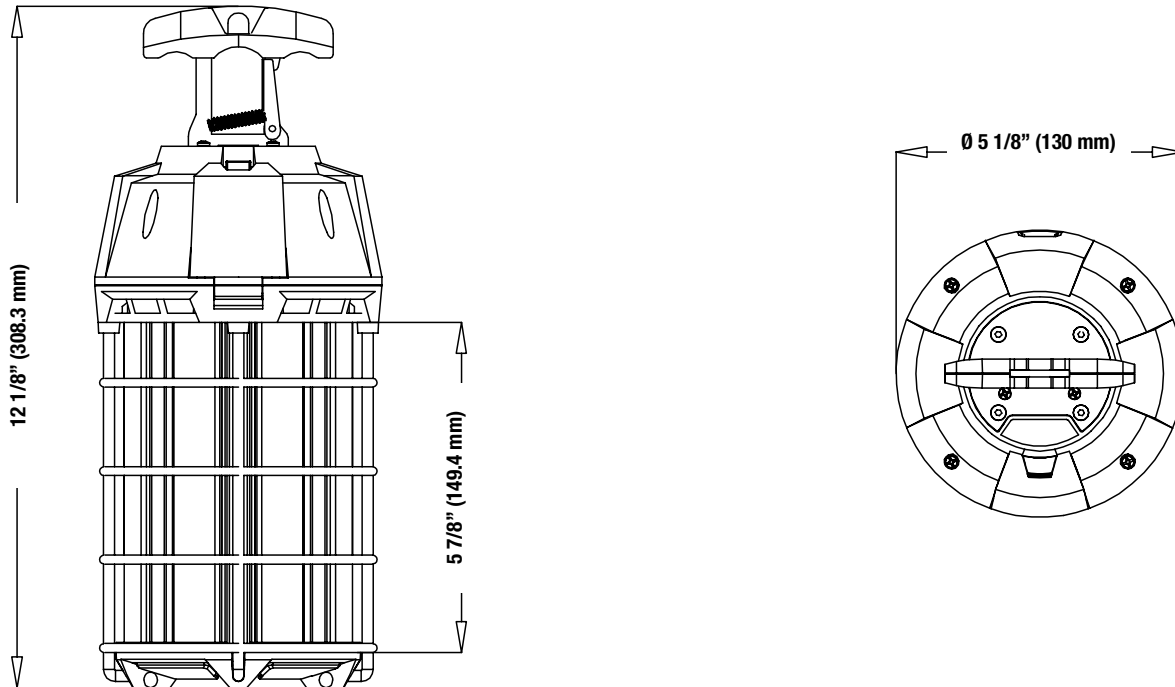

PHOTOMETRIC DATA¹

68701 • THB-DSC-150W-CW • 17 396.0 lm

Polar candela distribution

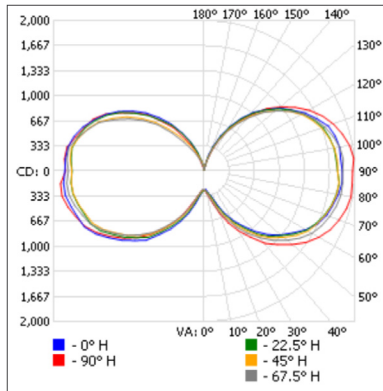

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	462.0	2.7
0-40	1 080.0	6.2
0-60	3 426.5	19.7
60-90	5 644.2	32.4
70-100	5 954.5	34.2
90-120	5 497.5	31.6
0-90	9 070.7	52.1
90-180	8 325.3	47.9
0-180	17 396.0	100

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.