



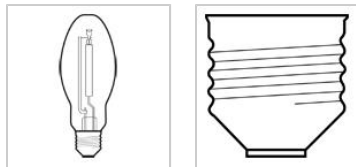

GE
Lighting

13250 - LU100/MED/ECO

GE Lucalox® High Pressure Sodium B17

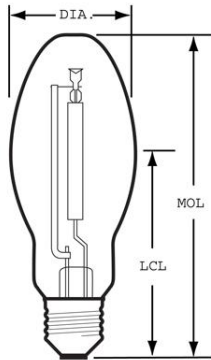

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.

Warning

- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Do not use lamp if outer glass is scratched or broken.
 - Use only properly rated ballast.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	B17
Base	Medium Screw (E26)
Bulb Finish	Clear
Rated Life (MIN)	24000.0 h
Rated Life (NOM)	24000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Mercury Content (NOM)	15.84 mg
Picograms of Mercury (NOM)	77.2 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	9500.0
Mean Lumens (NOM)	8550.0
Nominal Initial Lumens per Watt (NOM)	95.0
Color Temperature (NOM)	2000.0 K
Color Rendering Index (CRI) (NOM)	22.0
Effective Arc Length (NOM)	1.4 in

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	100.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Hot Restart Time to 90% (MAX)	40.0 s

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.500 in(139.7 mm)
Nominal Length (NOM)	5.500 in(139.7 mm)
Bulb Diameter (DIA) (NOM)	2.125 in(54.0 mm)
Light Center Length (LCL) (NOM)	3.430 in(87.1 mm)

PRODUCT INFORMATION

Product Code	13250
Description	LU100/MED/ECO
ANSI Code	S54
Standard Package	Case
Standard Package GTIN	10043168132500
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168132503

