

# StreamLine® Modular Electronic Sounder

Model SLM700



Model SLM700 shown with mounting base options (ordered separately)

## MULTIFUNCTIONAL SOUNDER WITH TWO SEPARATE ALARM LEVELS

- Compatible with 12-24VAC/DC or 120-240VAC\*
- 64 different tones
- Two alarm levels
- 105 dB(A) @ 1m, adjustable volume minimum of 65 dB(A)
- Type 3R, IP65
- CE Compliant
- UL and cUL listed

\*Voltage is dependent on selected base.

Model SLM700 is a multifunctional electronic sounder developed with a Multiple Input technology that allows two separate levels of alarm (pre-alarm, alarm) controllable via independent electric contacts.

Model SLM700 offers a high acoustic performance through 2 channels offering 64 tones, 32 tones per input selectable via dip switch. Input 1 (pre-alarm) and input 2 (alarm) both offer a powerful electronic tone adjustable from 65 dB(A) up to 105 dB(A) @ 1 meter. Model SLM700 is ideal for alerting staff of a danger or a serious change of operating circumstances.

Five mounting options are available: shallow or deep base, single or double wall mount and pipe mount.

Model SLM700 body material is a self extinguishing polycarbonate material with high impact and UV resistance suitable for outdoor applications. SLM700 body color is offered in gray or red. Optional stainless steel heavy-duty protection grid is available. This unit is IP65/TYPER 3R protection grade, CE Compliant, UL and cUL listed.

Model	Voltage	Decibels @ 1m		Maximum Operating Current (mA)			
		Min.	Max.	12 VDC/DC	24 VDC/DC	120 VAC	240 VAC
SLM700*	12-24VAC/DC or 120-240VAC	65	105	240	280	60	35

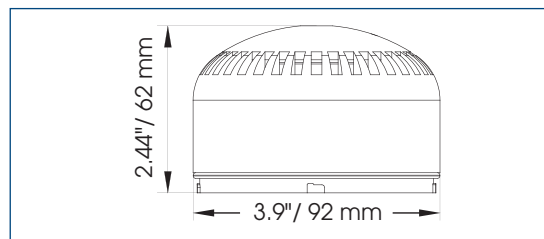
\*For body color, indicate GY for Gray or R for Red.



## STREAMLINE® MODULAR MULTIFUNCTIONAL LOW PROFILE LED INDICATOR (SLM700)

### SPECIFICATIONS



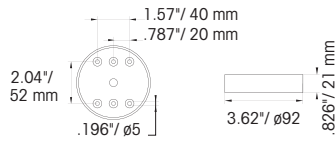


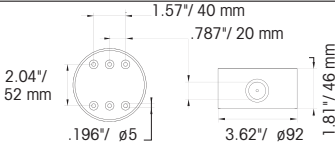


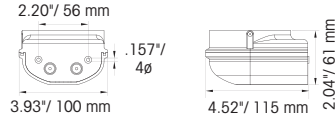





Operating Temperature:	-22°F to 122°F	-30°C to 50°C
Weight (unit(s) + base = total weight)		
SLM700	3.88 oz.	0.11 kg
Shallow base	2.12 oz.	0.06 kg
Deep Base		
12-24 VDC/AC	4.23 oz.	0.12 kg
120-240 VAC	6.0 oz.	0.17 kg
Wall Mount		
12-24 VDC/AC	6.70 oz.	0.19 kg
120-240 VAC	8.47 oz.	0.24 kg
Pipe Mount		
12-24 VDC/AC	5.29 oz.	0.15 kg
120-240 VAC	6.70 oz.	0.19 kg
Twin Wall Mount		
12-24 VDC/AC	9.17 oz.	0.26 kg
120-240 VAC	12.35 oz.	0.35 kg



### HOW TO ORDER

- Specify model number:  
SLM700GY (Gray body) SLM700R (Red body)
- Specify required mounting base (see chart)
- Optional dome guard  
For shallow mounting base (SLMDG1)  
For deep mounting base (SLMDG2)
- Accessories for Twin and Wall Mount Bases  
Cable Gland, M20, Gray, 2 Pack (K77700416)  
Cable Gland, M20, Red, 2 Pack (K77700416-01)
- Accessories for Pipe Mount Base  
1" NPT Adapter (SLMNPT1)  
1/2" NPT Adapter (SLMNPT2)

### MOUNTING BASE OPTIONS

	Model Number	Base Color	Voltage	
  Shallow Base	SLMBS-012-024GY	Gray	12-24VDC/AC	
  Deep Base	SLMBD-012-024GY	Gray	12-24VDC/AC	
	SLMBD-012-024R	Red	12-24VDC/AC	
	SLMBD-120-240GY	Gray	120-240VAC	
	SLMBD-120-240R	Red	120-240VAC	
  Wall Mount	SLMBW-012-024GY	Gray	12-24VDC/AC	
	SLMBW-120-240GY	Gray	120-240VAC	
  Pipe Mount	SLMBP-012-024GY	Gray	12-24VDC/AC	Pipe Mount comes standard with 1/2" NPT Adapter 
	SLMBP-120-240GY	Gray	120-240VAC	
  Twin Wall Mount	SLMBT-012-024GY SLMBT-120-240GY	Gray	12-24VDC/AC 120-240VAC	