


Product data sheet

Specifications

SQUARE D



Terminal block, Linergy, sectional fuse holder, natural colored block, 30A, 600V

9080GF6

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	9080G
Product Type	Terminal block
Localisation on Device	Fusible
Color	Natural
Quantity	Set of 10

Complementary

Voltage Rating	600 V AC/DC
Current Rating	30 A UL 30 A CSA
Wire Size	AWG 18...AWG 10 copper
Mounting Type	35 mm DIN rail 9080GH track
Certifications	CSA file 62144 class 6228 01 CE UL recognized E60616 CCN XCFR2
Protection Type	Fingersafe DIN 57470
Electrical Connection	pressure wire clamp
Material	Nylon: block Tin plated copper: busbar
Ambient Air Temperature for Operation	-40...221 °F (-40...105 °C)
Electrical Connrection Tightening Torque	Clamp terminal zinc plated steel 18...20 lbf.in (2.03...2.3 N.m) : AWG 18...AWG 10 copper)
Height	2.33 in (59.18 mm)
Width	2.19 in (55.63 mm)
Depth	0.75 in (19.05 mm)
Density	16 per foot
Compatible End Barrier	GF6B

Ordering and shipping details

Category	US10CP521702
Discount Schedule	0CP5
GTIN	785901155034
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.800 in (2.032 cm)
Package 1 Width	2.100 in (5.334 cm)
Package 1 Length	2.300 in (5.842 cm)
Package weight(Lbs)	9.600 oz (272.155 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	2.300 in (5.842 cm)
Package 2 Width	2.600 in (6.604 cm)
Package 2 Length	7.500 in (19.050 cm)
Package 2 Weight	9.600 oz (272.155 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

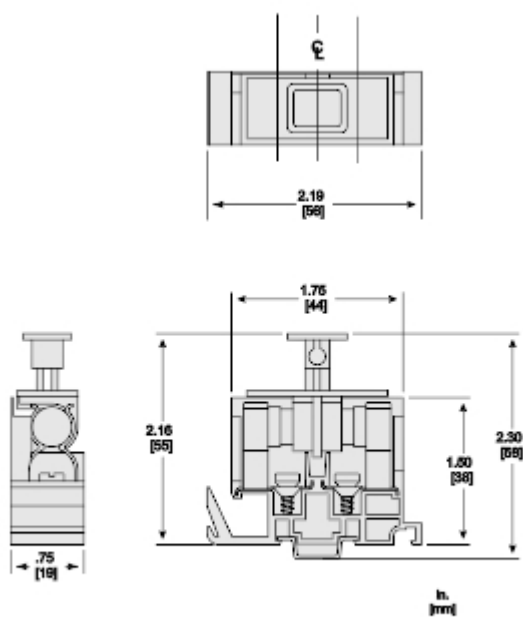

CLASS 9080 TYPE GF6
ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.