


## 155 Series Heavy-Duty Bayonet Knob In-Line Holders for 3AG Fuses



### Dimensions

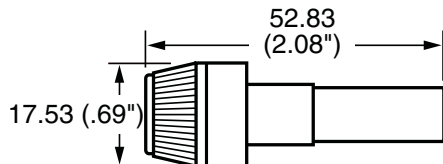

### Product Characteristics

| Compatible Fuses                            | For Low voltage 3AG or SFE Fuse Applications                                                                                                                                                               |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Electrical</b>                           | Intended for use at 32 volts or less with fuses rated up to 20 amperes when the proper spring is installed for full size.                                                                                  |
| <b>Molded Parts</b>                         | Body and knob are Black Thermoset (UL94 V-0). Both body and knob have a .20" diameter hole for insulated wire.                                                                                             |
| <b>Knob</b>                                 | Bayonet-lock type metal insert.                                                                                                                                                                            |
| <b>Ambient Temperature</b>                  | -40°C to +125°C.                                                                                                                                                                                           |
| <b>Contact Rivet</b>                        | Brass. Tin plated. Designed to accommodate #14 AWG stranded wire.                                                                                                                                          |
| <b>Assembled</b>                            | Includes fuse listed and 19" loop of #14 AWG red vinyl insulated wire.                                                                                                                                     |
| <b>Unassembled</b>                          | For assembly to #14 AWG wire.                                                                                                                                                                              |
| <b>Options</b>                              | 150 079 is similar to 155 020A except no fuse is supplied. It is intended for use with 3AG fuses rated up to 20 amperes.                                                                                   |
| <b>Universal In-Line Fuseholder 150 145</b> | Supplied with 15" loop of #14 AWG red vinyl insulated wire and three springs in different lengths to accommodate SFE sized fuses. Fuseholders with other wire sizes or lengths available on special order. |

\* Please refer to Fuseology section for information on proper fuseholder de-rating.

### Ordering Information

| Unassembled      |               | Assembled        |                |
|------------------|---------------|------------------|----------------|
| Catalog Number   | For Fuse Size | Catalog Number   | Fuse Installed |
| <b>155 004U</b>  | ¼" × 5/8"     | <b>155 004A</b>  | SFE 4          |
| <b>155 006U</b>  | ¼" × ¾"       | <b>155 006A</b>  | SFE 6          |
| <b>155 07.5U</b> | ¼" × 7/8"     | <b>155 07.5A</b> | SFE 7 ½        |
| <b>155 009U</b>  | ¼" × 7/8"     | <b>155 009A</b>  | SFE 9          |
| <b>155 014U</b>  | ¼" × 1 1/16"  | <b>155 014A</b>  | SFE 14         |
| <b>155 020U</b>  | ¼" × 1 ¼"     | <b>155 020A</b>  | SFE 20         |