

MF-SI 10/5 MC SDR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Similar to illustration

MultiFit is the Weidmüller marker system used for other makes of terminals. Similar to the Weidmüller Dekafix, the markers of the MultiFit family are available ready-for-use with standard printing.

We recommend to carry out a test with sample markers on the terminals used when using MultiFit for the first time.

- One marker, suitable for different makes of terminals.
- Ready-to-use markers with standard printing
- Blank markers for printing with the PrintJet CONNECT or Plotter
- Delivery of individually printed markers according to customer CAE data or specifications
- One marking system for all applications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Version	MultiFit, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Siemens, To customer specification
Order No.	1889170000
Type	MF-SI 10/5 MC SDR
GTIN (EAN)	4032248495474
Qty.	80 pièce(s)

MF-SI 10/5 MC SDR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Dimensions and weights

Height	10 mm	Height (inches)	0,394 inch
Width	5 mm	Width (inches)	0,197 inch
Net weight	0,25 g		

Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

General data

Application/manufacturere	Siemens		
Colour	To customer specification		
Colour of printing	black		
Halogen	No		
Material	Polyamide 66		
Number of markers per combination	1 MultiCard = Terminal marker		
Number of markers per packaging unit	Form of supply	MultiCard	
Operating temperature range	-40...100 °C		
Operating temperature range, max.	100 °C		
Operating temperature range, min.	-40 °C		
Orientation of print	horizontal and vertical		
Printed characters	Based on customer requirements (Please send M-Print PRO file)		
Printing method	MC Laser		
UL 94 flammability rating	V-2		
Width	5 mm		

Connector markers

Pitch in mm (P)	5 mm
-----------------	------

Classifications

ETIM 6.0	EC000761	ETIM 7.0	EC000761
ETIM 8.0	EC000761	ETIM 9.0	EC000761
ECLASS 9.0	27-14-11-37	ECLASS 9.1	27-14-11-37
ECLASS 10.0	27-14-11-37	ECLASS 11.0	27-28-11-01
ECLASS 12.0	27-28-11-01	ECLASS 13.0	27-28-11-01
ECLASS 14.0	27-28-11-01		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

Catalogues	Catalogues in PDF-format
------------	--


Fiche de données

MF-SI 10/5 MC SDR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Dessins

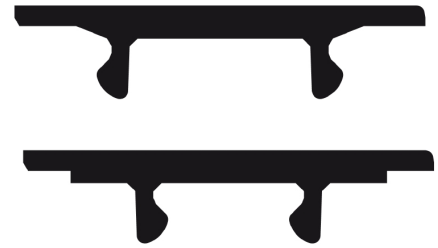

Drawing