

HDC-C-HE-BM0.75-1.00AG**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Crimps provide a electrical and mechanical connection between wire and contact that is both secure and reliable. The optimal crimp connection is gas-tight and corrosion-resistant.

General ordering data

Version	Heavy-duty connectors, Crimp contact, HE, HEE, HQ, MixMate, Female, Conductor cross-section, max.: 1, turned, Copper alloy
Order No.	1201200000
Type	HDC-C-HE-BM0.75-1.00AG
GTIN (EAN)	4008190044480
Qty.	100 pièce(s)

HDC-C-HE-BM0.75-1.00AG**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques**Dimensions and weights**

Diameter	4,5 mm	Net weight	1,55 g
----------	--------	------------	--------

General data

Conductor cross-section, max.	1 mm ²	Conductor cross-section, min.	0,75 mm ²
Contact diameter, male Ø	2,5 mm	Contact material	Copper alloy
Cross-section for connected wire	0,75 - 1 mm ²	Material	Copper alloy
Plugging cycles	≥ 500	Production methods	turned
Series	HE	Stripping length, rated connection	7,5 mm
Surface finish	silver	Surface layer thickness, max.	3 µm
Surface layer thickness, min.	2 µm	Type	Female
Type of connection	Crimp connection	Version insert	HE, HEE, HQ, MixMate
Volume resistance	≤2 mΩ		

Classifications

ETIM 6.0	EC000796	ETIM 7.0	EC000796
ETIM 8.0	EC000796	ETIM 9.0	EC000796
ECLASS 9.0	27-44-02-04	ECLASS 9.1	27-44-02-04
ECLASS 10.0	27-44-02-04	ECLASS 11.0	27-44-02-04
ECLASS 12.0	27-44-02-04	ECLASS 13.0	27-44-02-04
ECLASS 14.0	27-44-02-04		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	6eabd5ae-2d6b-409e-8bdf-87c27ee10e40

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

Downloads

Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN


Fiche de données

HDC-C-HE-BM0.75-1.00AG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Dessins

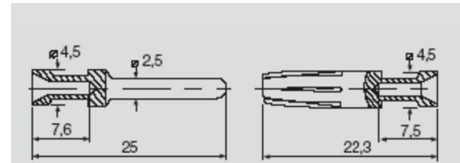

Leiterquerschnitt	Abisolierlänge	
0,50 mm ²	AWG 20	7,5 mm
0,75 - 1,00 mm ²	AWG 18	7,5 mm
1,50 mm ²	AWG 16	7,5 mm
2,50 mm ²	AWG 14	7,5 mm
4,00 mm ²	AWG 12	7,5 mm

