


# 8536SDO1V03H30

NEMA Motor Starter, Type S, nonreversing, Size 2, 45A, 25 HP at 460 VAC, up to 100 kA SCCR, 3 phase, 3 pole, Motor Logic, 240 VAC coil, open

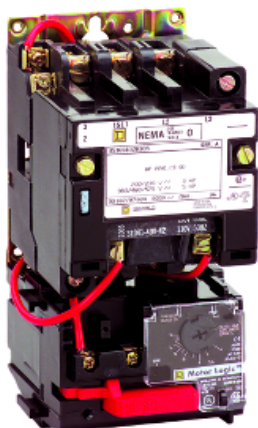

## Principal

Product Type	Démarrateur moteur
Product Range	S
Starter Type	Non réversible

## Complémentaire

NEMA Size	2
Rated Current	45 A
Number of Poles	3P
Maximum Voltage Rating	600 V AC
Phase	3 phases
Type of Overload	Solid state Motor Logic class 10/20
Horsepower Rating	10 HP at 200 V AC 15 HP at 230 V AC 25 HP at 460 V AC 25 HP at 575 V AC
SCCR	Circuit-breaker 100 A maximum: 100 kA at 480 V AC Fuse J 100 A maximum: 100 kA at 600 V AC Fuse T 100 A maximum: 100 kA at 600 V AC Fuse RK1 100 A maximum: 100 kA at 600 V AC Fuse RK5 100 A maximum: 100 kA at 600 V AC
Coil Voltage	220 V AC 50 Hz 240 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Sans
Terminal Type	Borniers à vis-étrier

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Height	198,37 mm
Width	109,47 mm
Depth	125,48 mm

## Environnement

Enclosure Type	Not rated (open device)
Certifications	Listé UL CSA NEMA

## Emballage

Poids de l'emballage (Kg)	3,130 kg
Hauteur de l'emballage 1	16,510 cm
Largeur de l'emballage 1	17,780 cm
Longueur de l'emballage 1	24,130 cm

## Offre de la durabilité

Régulation REACH	<a href="#">Déclaration REACH</a>
Directive RoHS UE	Conforme <a href="#">Déclaration RoHS UE</a>
Sans mercure	Oui
Information sur les exemptions RoHS	<a href="#">Oui</a>
Régulation RoHS Chine	<a href="#">Déclaration RoHS pour la Chine</a> Produit en dehors du périmètre RoHS pour la Chine. Déclaration relative aux substances pour votre information.
Sans PVC	Oui

## Garantie contractuelle

Garantie	18 months
----------	-----------