


## 8736SDO2V08

NEMA Starter, Type S, reversing, horizontal, Size 2, 45A, 25 HP at 575 VAC, 5 kA SSCR, 3 phase, 3 pole, melting alloy overload, 208 VAC coil, open

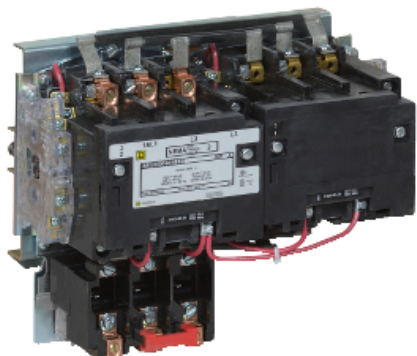

### Principal

Product Type	Starter
Product Range	S
Starter Type	Réversible

### Complémentaire

NEMA Size	2
Rated Current	45 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 fils
Maximum Voltage Rating	600 V AC
Phase	3 phases
Type of Overload	Melting alloy 3
Horsepower Rating	10 HP at 200 V AC 15 HP at 230 V AC 25 HP at 460 V AC 25 HP at 575 V AC
SCCR	Disjoncteur: 5 kA at 600 V AC Fusible: 5 kA at 600 V AC
Coil Voltage	208 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Borniers à vis-étrier
Height	215,90 mm

Width	228,60 mm
Depth	153,16 mm

### Environnement

Enclosure Type	Not rated (open device)
Certifications	Listé UL CSA

### Emballage

Poids de l'emballage (Kg)	13,608 kg
---------------------------	-----------

### Offre de la durabilité

Directive RoHS UE	En cours d'investigation
-------------------	--------------------------

### Garantie contractuelle

Garantie	18 months
----------	-----------