


8736SDO2V02H30S

NEMA Starter, Type S, reversing, horizontal, Size 2, 45A, 25 HP at 575 VAC, up to 100 kA SCCR, 3 phase, 3 pole, Motor Logic SSOLR, 120 VAC coil, open

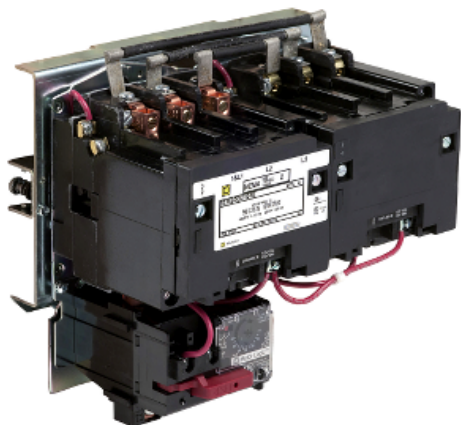

Principal

Product Type	Starter
Product Range	S
Starter Type	Réversible

Complémentaire

NEMA Size	2
Rated Current	45 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 fils
Maximum Voltage Rating	600 V AC
Phase	3 phases
Type of Overload	Solid state Motor Logic class 10/20
Horsepower Rating	10 HP at 200 V AC 15 HP at 230 V AC 25 HP at 460 V AC 25 HP at 575 V AC
SCCR	Circuit-breaker 100 A maximum: 100 kA at 480 V AC Fuse J 100 A maximum: 100 kA at 600 V AC Fuse T 100 A maximum: 100 kA at 600 V AC Fuse RK1 100 A maximum: 100 kA at 600 V AC Fuse RK5 100 A maximum: 100 kA at 600 V AC
Coil Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Control Circuit Type	Separate control circuit
Control Units	No control units

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Borniers à vis-étrier
Height	215,90 mm
Width	228,60 mm
Depth	153,16 mm

Environnement

Enclosure Type	Not rated (open device)
Certifications	Listé UL CSA

Emballage

Poids de l'emballage (Kg)	15,876 kg
Hauteur de l'emballage 1	21,590 cm
Largeur de l'emballage 1	28,702 cm
Longueur de l'emballage 1	34,798 cm

Offre de la durabilité

Directive RoHS UE	Non conforme
Régulation RoHS Chine	Déclaration RoHS pour la Chine Produit en dehors du périmètre RoHS pour la Chine. Déclaration relative aux substances pour votre information.

Garantie contractuelle

Garantie	18 months
----------	-----------