

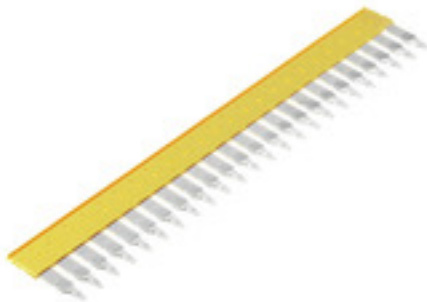
**ZQV 6/24 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

Version	Accessories, Cross-connector, 41 A
Order No.	<a href="#">1908990000</a>
Type	ZQV 6/24 GE
GTIN (EAN)	4032248535309
Qty.	10 pièce(s)

**ZQV 6/24 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Caractéristiques techniques****Dimensions and weights**

Depth	33,96 mm	Depth (inches)	1,337 inch
Height	192,5 mm	Height (inches)	7,579 inch
Width	3,1 mm	Width (inches)	0,122 inch
Net weight	34,603 g		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

**Material data**

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

**System specifications**

Version	For the terminals
---------	-------------------

**Additional technical data**

Installation advice	Direct mounting	Type of fixing	Plugged
---------------------	-----------------	----------------	---------

**Cross-connector**

Rated current, 2-pole	41 A	Rated current, multi-pole	41 A
Type	Cross-connector		

**Dimensions**

Pitch in mm (P)	8,1 mm
-----------------	--------

**General**

Installation advice	Direct mounting	Number of poles	24
---------------------	-----------------	-----------------	----

**Rating data**

Rated voltage	400 V	Rated DC voltage	400 V
Rated current	41 A		

**Classifications**

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40
ECLASS 12.0	27-14-11-40	ECLASS 13.0	27-25-03-03
ECLASS 14.0	27-25-03-03		

**Environmental Product Compliance**

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Date de création 26 novembre 2024 13:58:59 CET

Niveau du catalogue 26.11.2024 / Toutes modifications techniques réservées

## ZQV 6/24 GE

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Caractéristiques techniques

### Important note

Product information Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used

### Approvals

ROHS Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">Confirmation of Standards EN 45545-2_2020-10</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Operating instructions_ZDU1.5-ZDU35_ZQV.pdf</a> <a href="#">StorageConditionsTerminalBlocks</a> <a href="#">User Manual ZQV 2.5</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	