

## WS 12/5 PLUS MC NE WS


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

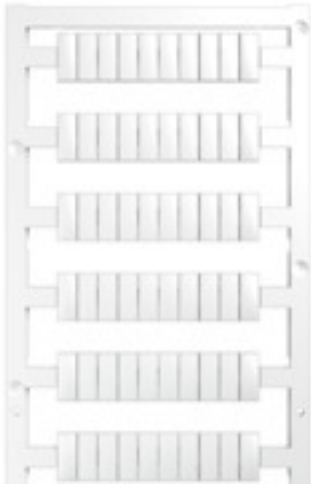

WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text.

WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Version	WS, Terminal marker, 12 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, Allen-Bradley, white
Order No.	<a href="#">1927510000</a>
Type	WS 12/5 PLUS MC NE WS
GTIN (EAN)	4032248574186
Qty.	600 pièce(s)
compatible printer	<a href="#">2715590000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>

## WS 12/5 PLUS MC NE WS

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Caractéristiques techniques

### Dimensions and weights

Height	12 mm	Height (inches)	0,472 inch
Width	5 mm	Width (inches)	0,197 inch
Net weight	0,12 g		

### Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

### General data

Application/manufacturere	Weidmueller, Allen-Bradley		
Colour	white		
Halogen	No		
Material	Polyamide 66		
Material colour according to resistance code	9		
Number of markers per combination	1 MultiCard = Terminal marker		
Number of markers per packaging unit	Form of supply	MultiCard	
Operating temperature range	-40...100 °C		
Operating temperature range, max.	100 °C		
Operating temperature range, min.	-40 °C		
Printed characters	neutral		
UL 94 flammability rating	V-2		
Width	5 mm		

### Connector markers

Pitch in mm (P)	5 mm
-----------------	------

### Classifications

ETIM 6.0	EC000761	ETIM 7.0	EC000761
ETIM 8.0	EC000761	ETIM 9.0	EC000761
ECLASS 9.0	27-14-11-37	ECLASS 9.1	27-14-11-37
ECLASS 10.0	27-14-11-37	ECLASS 11.0	27-28-11-01
ECLASS 12.0	27-28-11-01	ECLASS 13.0	27-28-11-01
ECLASS 14.0	27-28-11-01		

Cradle to gate

0.879 kg CO2 eq.

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Product Carbon Footprint	de.myview.objectmodel.impl.BlockImpl@1d67c177

### Approvals

ROHS	Conform
------	---------

**Fiche de données****WS 12/5 PLUS MC NE WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Caractéristiques techniques****Downloads**

Engineering Data	<a href="#">CAD data – STEP</a>
Product Change Notification	<a href="#">Technical change to MultiCard material - DE</a> <a href="#">Technical change to MultiCard material - EN</a> <a href="#">MultiCard Material modification</a> <a href="#">MultiCard Material Modifikation</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

**Fiche de données**

**WS 12/5 PLUS MC NE WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Dessins**



**Drawing**

