


ORDERING INFORMATION

Order code: 61134
 Description: E432T8IS120-277/L/AS
 UPC: 69549611344

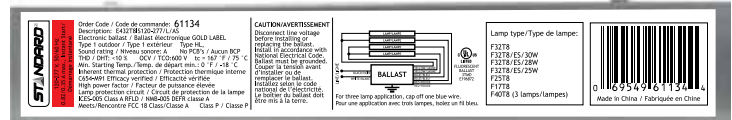

SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Instant Start	Contains PCBs:	No
Lamp connection:	Parallel	Sound rating:	A
Input voltage (V):	120-277	Open current voltage (OCV) (V):	600
Input frequency (Hz):	60	Inherent thermal protection:	Yes
Max. case temperature:	75 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A RFLD
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F32T8 (32W)	4	32	0/-18	0.82	98	0.77	10	0.99	1.7	0.79
F32T8/ES (30W)	4	30	0/-18	0.78	92	0.77	10	0.98	1.7	0.84
F32T8/ES (28W)	4	28	0/-18	0.73	86	0.77	10	0.98	1.7	0.90
F32T8/ES (25W)	4	25	0/-18	0.65	77	0.77	10	0.98	1.7	1.00
F25T8 (25W)	4	25	0/-18	0.64	76	0.78	10	0.98	1.7	1.03
F17T8 (17W)	4	17	0/-18	0.46	54	0.81	10	0.98	1.7	1.50
LED22T8 (22W)	4	22	0/-18	0.65	77	-	10	0.99	-	-
LED18T8 (18W)	4	18	0/-18	0.57	67	-	10	0.98	-	-
F32T8 (32W)	3	32	0/-18	0.68	81	0.82	10	0.98	1.7	1.01
F32T8/ES (30W)	3	30	0/-18	0.62	75	0.84	10	0.98	1.7	1.12
F32T8/ES (28W)	3	28	0/-18	0.57	69	0.85	10	0.98	1.7	1.23
F32T8/ES (25W)	3	35	0/-18	0.53	62	0.84	10	0.98	1.7	1.35
F25T8 (25W)	3	25	0/-18	0.53	62	0.84	10	0.98	1.7	1.35
F17T8 (17W)	3	17	0/-18	0.37	44	0.87	20	0.98	1.7	1.98
F40T8 (40W)	3	40	32/0	0.82	98	0.84	10	0.99	1.7	0.86
LED22T8 (22W)	3	22	0/-18	0.55	64	-	10	0.98	-	-
LED18T8 (18W)	3	18	0/-18	0.47	55	-	10	0.98	-	-
LED22T8 (22W)	2	22	0/-18	0.42	49	-	10	0.97	-	-
LED18T8 (18W)	2	18	0/-18	0.36	42	-	10	0.96	-	-
LED22T8 (22W)	1	22	0/-18	0.27	31	-	10	0.94	-	-
LED18T8 (18W)	1	18	0/-18	0.23	26	-	10	0.92	-	-

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. March 9, 2015

ORDERING INFORMATION

Order code: 61134
 Description: E432T8IS120-277/L/AS
 UPC: 69549611344

Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
277 VOLTS										
F32T8 (32W)	4	32	0/-18	0.35	96	0.77	10	0.98	1.7	0.80
F32T8/ES (30W)	4	30	0/-18	0.34	92	0.77	10	0.98	1.7	0.84
F32T8/ES (28W)	4	28	0/-18	0.32	86	0.77	10	0.98	1.7	0.90
F32T8/ES (25W)	4	25	0/-18	0.28	77	0.77	10	0.98	1.7	1.00
F25T8 (25W)	4	25	0/-18	0.27	74	0.78	10	0.98	1.7	1.05
F17T8 (17W)	4	17	0/-18	0.19	52	0.81	10	0.98	1.7	1.56
LED22T8 (22W)	4	22	0/-18	0.65	77	-	10	0.99	-	-
LED18T8 (18W)	4	18	0/-18	0.57	67	-	10	0.98	-	-
F32T8 (32W)	3	32	0/-18	0.29	80	0.82	10	0.98	1.7	1.03
F32T8/ES (30W)	3	30	0/-18	0.67	74	0.84	10	0.98	1.7	1.14
F32T8/ES (28W)	3	28	0/-18	0.25	68	0.85	10	0.98	1.7	1.25
F32T8/ES (25W)	3	35	0/-18	0.22	61	0.84	10	0.98	1.7	1.38
F25T8 (25W)	3	25	0/-18	0.22	61	0.84	10	0.98	1.7	1.38
F17T8 (17W)	3	17	0/-18	0.18	44	0.87	20	0.98	1.7	1.98
F40T8 (40W)	3	40	32/0	0.35	96	0.84	10	0.98	1.7	0.88
LED22T8 (22W)	3	22	0/-18	0.55	64	-	10	0.98	-	-
LED18T8 (18W)	3	18	0/-18	0.47	55	-	10	0.98	-	-
LED22T8 (22W)	2	22	0/-18	0.42	49	-	10	0.97	-	-
LED18T8 (18W)	2	18	0/-18	0.36	42	-	10	0.96	-	-
LED22T8 (22W)	1	22	0/-18	0.27	31	-	10	0.94	-	-
LED18T8 (18W)	1	18	0/-18	0.23	26	-	10	0.92	-	-

WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015

ORDERING INFORMATION

Order code: 61134
 Description: E432T8IS120-277/L/AS
 UPC: 69549611344

WIRING DIAGRAM

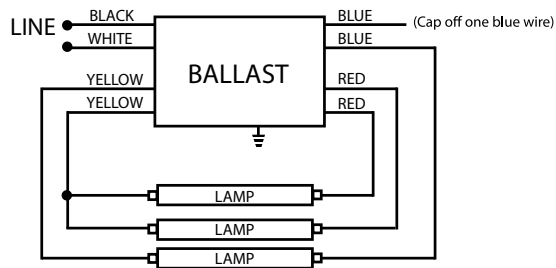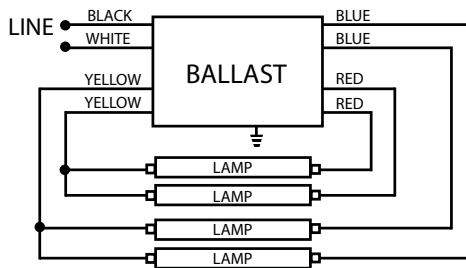


LEADS LENGTH

Black	25" (63.50 cm)
White	25" (63.50 cm)
Blue	31" (78.74 cm)
Red	31" (78.74 cm)
Yellow	46" (116.84 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.30" (3.30 cm)
Height (H):	1.00" (2.54 cm)
Mounting (M):	8.91" (22.63 cm)

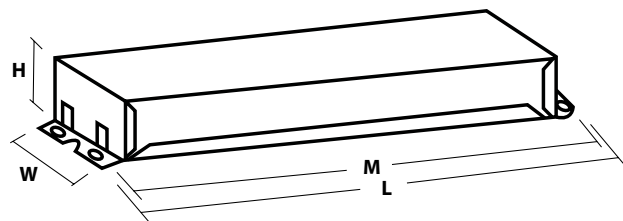

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015