

BBP®33 Materials

www.BradyID.com/bbp33

BBP®33 General Identification Materials: B-595 Indoor/Outdoor Vinyl Material

For general facility and safety identification

- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to “difficult” low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)




Figure 33



Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8-10 year outdoor vinyl label durability.

Facility and Safety Applications:

- 5S Labels
- Pipe Markers
- Safety & Warning Labels
- Equipment & Panel Labels
- Arc Flash & Chemical Labels
- And More!

Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-500-595-WT	B-595	Vinyl	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-WT	B-595	Vinyl	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-WT	B-595	Vinyl	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-3000-595-WT	B-595	Vinyl	White	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-WT	B-595	Vinyl	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-595-YL	B-595	Vinyl	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-YL	B-595	Vinyl	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-YL	B-595	Vinyl	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-3000-595-YL	B-595	Vinyl	Yellow	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-YL	B-595	Vinyl	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-595-RD	B-595	Vinyl	Red	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-RD	B-595	Vinyl	Red	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-RD	B-595	Vinyl	Red	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-RD	B-595	Vinyl	Red	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-BL	B-595	Vinyl	Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-BL	B-595	Vinyl	Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-BL	B-595	Vinyl	Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-BL	B-595	Vinyl	Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-GN	B-595	Vinyl	Green	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-GN	B-595	Vinyl	Green	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-GN	B-595	Vinyl	Green	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-GN	B-595	Vinyl	Green	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-OR	B-595	Vinyl	Orange	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-OR	B-595	Vinyl	Orange	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-OR	B-595	Vinyl	Orange	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-OR	B-595	Vinyl	Orange	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-595-BK	B-595	Vinyl	Black	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-BK	B-595	Vinyl	Black	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-BK	B-595	Vinyl	Black	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-BK	B-595	Vinyl	Black	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-BR	B-595	Vinyl	Brown	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-BR	B-595	Vinyl	Brown	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-BR	B-595	Vinyl	Brown	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-BR	B-595	Vinyl	Brown	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-GD	B-595	Vinyl	Gold	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-GD	B-595	Vinyl	Gold	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-GD	B-595	Vinyl	Gold	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-GD	B-595	Vinyl	Gold	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-595-GY	B-595	Vinyl	Gray	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-GY	B-595	Vinyl	Gray	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-GY	B-595	Vinyl	Gray	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-GY	B-595	Vinyl	Gray	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-595-PL	B-595	Vinyl	Purple	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-595-PL	B-595	Vinyl	Purple	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-595-PL	B-595	Vinyl	Purple	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-595-PL	B-595	Vinyl	Purple	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-595-CL	B-595	Vinyl	Clear	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-595-CL	B-595	Vinyl	Clear	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-595-CL	B-595	Vinyl	Clear	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-595-CL	B-595	Vinyl	Clear	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

BBP[®]33 General Identification Materials:

B-569 Low-Halide Polyester Material
For labeling stainless steel and smooth surfaces.

- Low-halide content for labeling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels

Service temp: -40°F to 212°F Application temp: 0°F to 212°F
Average Outdoor Durability: 3-5 years




Figure 33

Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-500-569-WT	B-569	Polyester	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-WT	B-569	Polyester	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-WT	B-569	Polyester	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-3000-569-WT	B-569	Polyester	White	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-WT	B-569	Polyester	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-YL	B-569	Polyester	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-YL	B-569	Polyester	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-YL	B-569	Polyester	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-YL	B-569	Polyester	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-RD	B-569	Polyester	Red	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-RD	B-569	Polyester	Red	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-RD	B-569	Polyester	Red	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-RD	B-569	Polyester	Red	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-BL	B-569	Polyester	Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-BL	B-569	Polyester	Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-BL	B-569	Polyester	Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-BL	B-569	Polyester	Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-LB	B-569	Polyester	Light Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-LB	B-569	Polyester	Light Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-LB	B-569	Polyester	Light Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-LB	B-569	Polyester	Light Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-SB	B-569	Polyester	Sky Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-SB	B-569	Polyester	Sky Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-SB	B-569	Polyester	Sky Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-SB	B-569	Polyester	Sky Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-GN	B-569	Polyester	Green	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-GN	B-569	Polyester	Green	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-GN	B-569	Polyester	Green	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-GN	B-569	Polyester	Green	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-OR	B-569	Polyester	Orange	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-OR	B-569	Polyester	Orange	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-OR	B-569	Polyester	Orange	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-OR	B-569	Polyester	Orange	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-BK	B-569	Polyester	Black	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-BK	B-569	Polyester	Black	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-BK	B-569	Polyester	Black	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-BK	B-569	Polyester	Black	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-BR	B-569	Polyester	Brown	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-BR	B-569	Polyester	Brown	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-BR	B-569	Polyester	Brown	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-BR	B-569	Polyester	Brown	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-OC	B-569	Polyester	Ochre	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-OC	B-569	Polyester	Ochre	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-OC	B-569	Polyester	Ochre	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-OC	B-569	Polyester	Ochre	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-TN	B-569	Polyester	Tan	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-TN	B-569	Polyester	Tan	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-TN	B-569	Polyester	Tan	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-TN	B-569	Polyester	Tan	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-GY	B-569	Polyester	Gray	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-GY	B-569	Polyester	Gray	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-GY	B-569	Polyester	Gray	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-GY	B-569	Polyester	Gray	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-PL	B-569	Polyester	Purple	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-1125-569-PL	B-569	Polyester	Purple	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-2250-569-PL	B-569	Polyester	Purple	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-4000-569-PL	B-569	Polyester	Purple	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP31, BBP33	Fig. 33	B30C-500-569-PK	B-569	Polyester	Pink	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-PK	B-569	Polyester	Pink	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-PK	B-569	Polyester	Pink	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-PK	B-569	Polyester	Pink	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-569-CL	B-569	Polyester	Clear	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-569-CL	B-569	Polyester	Clear	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-569-CL	B-569	Polyester	Clear	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-569-CL	B-569	Polyester	Clear	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

BBP[®]33 Printer Ribbons on page 109.
Full Material Properties on page 187.

BBP®33 Materials

www.BradyID.com/bbp33

BBP®33 General Identification Materials:

B-595 Pre-Printed Pre-Cut Blank Sign Headers

- Allows printer to create multicolor signs fast - in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor/outdoor grade material conforms to rough, highly textured, and "difficult to adhere to" surfaces

Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8-10 years




Figure 70



Use these supplies with templates in the BBP®33 printer & MarkWare™ Software for arc flash labels and safety warning labels

Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 70	B30-241-595-OSHADA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-OSHADA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-OSHACA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-OSHACA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-ANSICA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-ANSICA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-ANSIDA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-ANSIDA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-ANSIWA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-ANSIWA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-ANSINO	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-ANSINO	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-242-595-BLNKWT	B-595	Vinyl		1.125 (28.6)*	2.850 (72.4)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-219-595-BLNKWT	B-595	Vinyl		2.250 (57.5)*	3.850 (97.8)	1	250	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-BLNKWT	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP31, BBP33	Fig. 70	B30-241-595-BLNKYL	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	Fig. 70	B30-25-595-BLNKYL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

*Pre-sized to fit blank rigid valve tags but can also be used on its own as general purpose label. Visit www.BradyID.com for information on Valve Tag Kit, catalog #142133.

BBP®33 General Identification Materials:

B-551 Non-Adhesive Pre-Printed & Pre-Cut Safety Tags

Pre-printed and pre-cut to save you time

- Non-adhesive semi-rigid polyester card stock
- Tags are pre-cut with hole and chamfered corners
- Perforated between tags
- Snap-in plastic grommets available for extra strength around mounting hole

Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8-10 years




Figure 69



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Row	Tags Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 69	B30-255-551-ANSIDA	B-551	Polyester		3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP31, BBP33	Fig. 69	B30-255-551-OSHADA	B-551	Polyester		3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP31, BBP33	Fig. 69	B30-255-551-ANSICA	B-551	Polyester		3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP31, BBP33	Fig. 69	B30-255-551-WHT	B-551	Polyester		3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000

BBP@33 General Identification Materials:

B-7569 Pre-Printed GHS / CLP Chemical Labels
Print 2-color GHS labels in one fast print pass

- Blank labels with pre-printed red diamonds allow printer to produce 2-color GHS / CLP labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in MarkWare™ Software
- Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling
- MarkWare Software v3.9.1 or higher required (upgrades available for current MarkWare owners)

Service temp: -4°F to 180°F Application temp: 50°F to 180°F
 Average Outdoor Durability: 3-5 years



Fits Printer Model(s)	Catalog #	B#	Material	Legend	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	B30-260-7569-CLP1	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP1	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP1	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP31, BBP33	B30-260-7569-CLP2	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP2	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP2	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP31, BBP33	B30-260-7569-CLP3A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP3A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP3A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP31, BBP33	B30-260-7569-CLP3B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP3B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP3B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP31, BBP33	B30-260-7569-CLP4A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP4A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP4A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP31, BBP33	B30-260-7569-CLP4B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP31, BBP33	B30-261-7569-CLP4B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP31, BBP33	B30-262-7569-CLP4B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000



MarkWare™ Software now includes a GHS / CLP Label Module

- 18 pre-formatted label layouts and approved GHS symbols are built-in
- User selects approved pre-worded hazard statements and GHS symbols which then automatically populates into layout – no need to type everything in
- Prompts for additional variable data which then auto-populates into layout
- Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling
- Choose a second language and MarkWare auto-populates in the second language

Already a MarkWare Software user? Go to www.BradyID.com/markware to upgrade your current MarkWare to v3.9.1 for the GHS / CLP Label Module.



BBP®33 General Identification Materials:

B-595 Pre-Printed Right-To-Know Chemical Labels
For quickly creating NFPA and Color Bar Labels.

- Allows printer to produce 5-color chemical labels in a single print pass
- Indoor/outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8 to 10 years



Fits Printer Model(s)	Catalog #	B#	Material	Legend	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	B30-244-595-NFPA	B-595	Vinyl		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, BBP33	B30-245-595-NFPA	B-595	Vinyl		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, BBP33	B30-263-595-NFPA	B-595	Vinyl		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, BBP33	B30-244-595-DIAM	B-595	Vinyl		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, BBP33	B30-161-595-DIAM	B-595	Vinyl		4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
BBP31, BBP33	B30-246-595-NFR	B-595	Vinyl		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
BBP31, BBP33	B30-244-595-CB	B-595	Vinyl		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, BBP33	B30-245-595-CB	B-595	Vinyl		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, BBP33	B30-263-595-CB	B-595	Vinyl		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, BBP33	B30-244-595-HMIG	B-595	Vinyl		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, BBP33	B30-246-595-HMIG	B-595	Vinyl		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

BBP®33 General Identification Materials:

B-551 Non-Adhesive Continuous Tag Stock Material
For safety, lockout and general purpose hang-tagging

- Non-adhesive, semi-rigid tag stock
- Easy to hole-punch; optional snap-in grommets available
- Meets OSHA 50 lb. pullout spec for lockout tags

Service temp: -40°F to 193°F Average Outdoor Durability: up to 2 years
Thickness: 0.35mm



Figure 33

Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Tag Width A Inch (mm)	Roll Length B Inch (mm)	Tags Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-2500-551-WT	B-551	Polyester	White	2.500 (63.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-3250-551-WT	B-551	Polyester	White	3.250 (82.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4250-551-WT	B-551	Polyester	White	4.250 (107.9)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

BBP®33 General Identification Materials:

B-526 BradyGlo™ High-Intensity Photoluminescent Material
For glow-in-the-dark identification up to 10 hours

- Designed for directional and evacuation marking and is ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls, and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40°F to 140°F Application temp: 40°F to 140°F



Figure 33

Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-1125-526	B-526	Polyester	Luminous Green	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-526	B-526	Polyester	Luminous Green	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-526	B-526	Polyester	Luminous Green	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

BBP@33 General Identification Materials:

B-584 Retro Reflective Material

For highly reflective material shines back brightly when struck by light

- Ideal for labeling outdoor utility poles and pedestals, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40°F to 158°F

Application temp: 0°F to 158°F (yellow & orange), 50°F to 158°F (silver)

Average Outdoor Durability: 4 to 6 years




Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-1125-584-SL	B-584	Reflective	Silver	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-584-SL	B-584	Reflective	Silver	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-584-SL	B-584	Reflective	Silver	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-584-YL	B-584	Reflective	Yellow	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-584-YL	B-584	Reflective	Yellow	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-584-YL	B-584	Reflective	Yellow	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-584-OR	B-584	Reflective	Orange	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-584-OR	B-584	Reflective	Orange	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-584-OR	B-584	Reflective	Orange	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

BBP@33 General Identification Materials:

B-509 Printable Magnetic Material

Easiest and quickest material for removing and repositioning

- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable and repositionable identification applications

Service temp: 0°F to 158°F

Average Outdoor Durability: 3 to 5 years




Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-2500-509-WT	B-509	Magnetic Polyester	White	2.500 (63.5)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4250-509-WT	B-509	Magnetic Polyester	White	4.250 (107.8)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2500-509-YL	B-509	Magnetic Polyester	Yellow	2.500 (63.5)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4250-509-YL	B-509	Magnetic Polyester	Yellow	4.250 (107.8)	25ft (7.62m)	1 roll (cont.)	B30-R10000

BBP@33 General Identification Materials:

B-581 Repositionable Vinyl Material

For 5S and lean applications

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable, and repositionable labels, like 5S and lean inventory labels

Service temp: -40°F to 180°F Application temp: 50°F to 180°F

Average Outdoor Durability: 5 years




Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-500-581-WT	B-581	Vinyl	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-581-WT	B-581	Vinyl	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-581-WT	B-581	Vinyl	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-581-WT	B-581	Vinyl	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-500-581-YL	B-581	Vinyl	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-581-YL	B-581	Vinyl	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-581-YL	B-581	Vinyl	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-581-YL	B-581	Vinyl	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

BBP®33 Materials

www.BradyID.com/bbp33

BBP@33 General Identification Materials:

B-549 Cold Temperature Application Material

Can be applied in -10°F and lasts in -40°F.

- Special adhesive permanently adheres to extremely cold surfaces
- Ideal for cold storage warehouses, coolers, freezers, and short-term winter outdoor use

Service temp: -40°F to 212°F Application temp: -10°F to 212°F
Average Outdoor Durability: Up to 1 year



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 33	B30C-1125-549-WT	B-549	Cold Temp	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-549-WT	B-549	Cold Temp	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-549-WT	B-549	Cold Temp	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-4000-549-YL	B-549	Cold Temp	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-2250-549-YL	B-549	Cold Temp	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP31, BBP33	Fig. 33	B30C-1125-549-YL	B-549	Cold Temp	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

BBP@33 General Identification Materials:

B-424 Paper Material

Economical choice for light duty general ID

- White finish and matte topcoat
- Excellent contrast and smear resistance

Service temp: -40°F to 124°F
Agency approvals: RoHS




Figure 2



Fits Printer Model	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 2	B33-17-424	B-424	Paper	White	2.000 (50.8)	1.000 (25.4)	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33	Fig. 2	B33-18-424	B-424	Paper	White	3.000 (76.2)	1.000 (25.4)	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33	Fig. 2	B33-19-424	B-424	Paper	White	3.000 (76.2)	2.000 (50.8)	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300
BBP33	Fig. 2	B33-25-424	B-424	Paper	White	4.000 (101.6)	6.000 (152.4)	6.125 (155.6)	4.200 (106.7)	1	350	B30-R4300

BBP@33 General Identification Materials:

B-425 Polypropylene Material

General labeling material for indoor use

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -94°F to 212°F
Agency approvals: RoHS

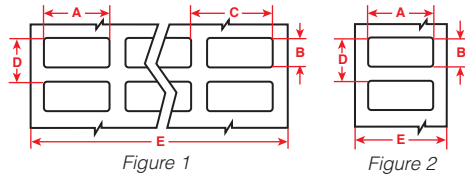


Figure 1

Figure 2



Fits Printer Model	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 1	B33-5-425	B-425	Polypropylene	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33	Fig. 2	B33-17-425	B-425	Polypropylene	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33	Fig. 2	B33-18-425	B-425	Polypropylene	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33	Fig. 2	B33-19-425	B-425	Polypropylene	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300

BBP@33 General Identification Label Materials:

B-595 Outdoor Grade Vinyl Material

- Good chemical, moisture, UV and weather resistance
- Highly pliable material conforms to rough and curved surfaces
- Average outdoor durability of the label is 8-10 years, depending on placement

Service temp: -40°F to 180°F Application temp: 0°F to 180°F




Figure 2



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, BBP33	Fig. 2	B30-242-595-BLNKWT	B-595	Vinyl	White	2.850 (72.4)	1.125 (28.6)	3.250 (82.6)	1.375 (35.0)	1	300	B30-R10000
BBP31, BBP33	Fig. 2	B30-241-595-BLNKWT	B-595	Vinyl	White	3.000 (76.2)	2.250 (57.2)	3.250 (82.6)	2.500 (63.5)	1	300	B30-R10000
BBP31, BBP33	Fig. 2	B30-241-595-BLNKYL	B-595	Vinyl	Yellow	3.000 (76.2)	2.250 (57.2)	3.250 (82.6)	2.500 (63.5)	1	300	B30-R10000
BBP31, BBP33	Fig. 2	B30-219-595-BLNKWT	B-595	Vinyl	White	3.850 (97.8)	2.250 (57.2)	4.250 (108.0)	2.500 (63.5)	1	250	B30-R10000
BBP31, BBP33	Fig. 2	B30-25-595-BLNKWT	B-595	Vinyl	White	6.000 (152.4)	4.000 (100.0)	6.250 (158.8)	4.250 (108.0)	1	175	B30-R10000
BBP31, BBP33	Fig. 2	B30-25-595-BLNKYL	B-595	Vinyl	Yellow	6.000 (152.4)	4.000 (100.0)	6.250 (158.8)	4.250 (108.0)	1	175	B30-R10000

BBP@33 Printer Ribbons on page 109.
Full Material Properties on page 187.