


ORDERING INFORMATION

Order code: 10066
 Description: BMH1000347/480/600/C/CWI/H/K/
 UPC: 69549100664

SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: Core and coil
 Circuit type: CWI
 ANSI code: M47
 Input voltage (V): 347/480/600
 Input frequency (Hz): 60
 Line volt regulation: $\pm 10\%$
 Line watt regulation: $\pm 10\%$
 Insulation class: H (180°)

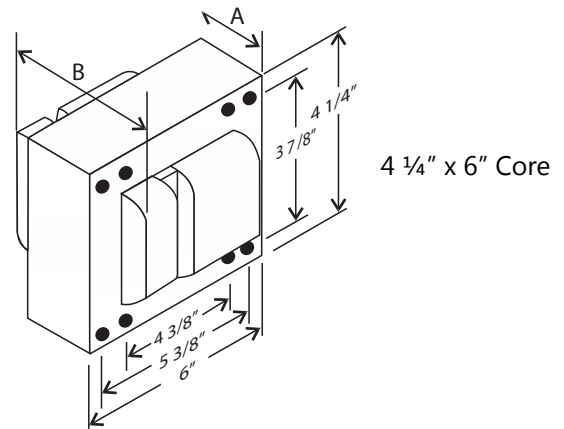

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
347	3.32	2.25	1.45	1 000	1 100	410	190	F	8	1.02 - 1.52	0.90	-20°F / -30°C
480	2.40	1.62	1.05	1 000	1 100	410	260	C	6	0.81 - 1.10	0.90	-20°F / -30°C
600	1.92	1.30	0.83	1 000	1 100	410	315	B	5	0.64 - 0.90	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	375 - 460
Short circuit:	5.20 - 6.00

BALLAST DIMENSIONS


Dimension A:	4.50"
Dimension B:	6.15"
Lead Lengths:	12.00"
Weight (lbs):	33.20

WIRING DIAGRAM

Ground ballast core

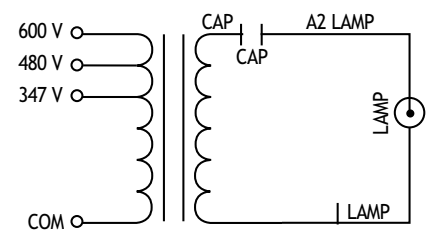

BRACKET

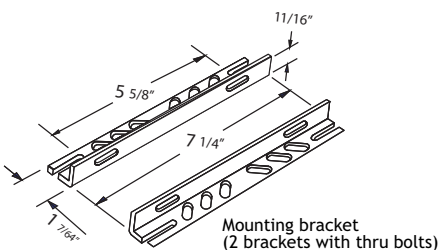

CAPACITOR

