


Dimensional Drawing



15 Amp Duplex

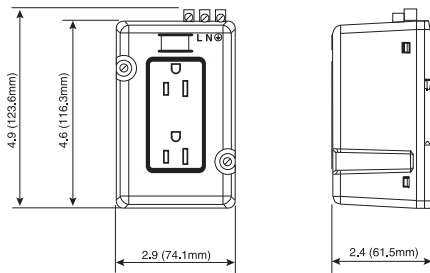

15 Amp GFCI



Technical data

Voltage	120 VAC nominal, 125 VAC max.
Current	15A max.
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498
Short-Circuit Current Rating (SCCR)	10 kA
Current Interrupting	2 kA
Trip Level	N/A
Termination Wire Size	20 - 10 AWG (solid or stranded, copper only)
Terminal Torque	0.79Nm/7 lb.-in.
Terminations	Screw terminals, slotted
Temperature:	
Operating	-25°C to 60°C
Storage	-35°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel
Mounting	TS35 DIN-Rail or direct panel mount
Width	74.1mm/2.9 in.
Length	123.6mm/4.9 in.
Height	61.5mm/2.4 in.

Voltage	120 VAC nominal, 125 VAC max.
Current	15A max.
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498
Short-Circuit Current Rating (SCCR)	10 kA
Current Interrupting	2 kA
Trip Level	N/A
Termination Wire Size	20 - 10 AWG (solid or stranded, copper only)
Terminal Torque	0.79Nm/7 lb.-in.
Terminations	Screw terminals, slotted
Temperature:	
Operating	-25°C to 60°C
Storage	-35°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel
Mounting	TS35 DIN-Rail or direct panel mount
Width	74.1mm/2.9 in.
Length	123.6mm/4.9 in.
Height	61.5mm/2.4 in.

Voltage	120 VAC nominal, 125 VAC max.
Current	15A max.
Operating Frequency	50 - 60 Hz
Dielectric Voltage	Withstands 1500V per UL498
Short-Circuit Current Rating (SCCR)	10 kA
Current Interrupting	10 kA
Trip Level	5mA ±1mA
Termination Wire Size	20 - 10 AWG (solid or stranded, copper only)
Terminal Torque	0.79Nm/7 lb.-in.
Terminations	Screw terminals, slotted
Temperature:	
Operating	-25°C to 60°C
Storage	-35°C to 80°C
Material Listing	
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel
Mounting	TS35 DIN-Rail or direct panel mount
Width	74.1mm/2.9 in.
Length	123.6mm/4.9 in.
Height	61.5mm/2.4 in.

Approvals/Certifications

Enclosure Type	NEMA WD6, 5-15R
----------------	-----------------

Description

• cULus Listed to UL508A and C22.2 No. 14 File E223801
NEMA WD6, 5-15R

Description

• cULus Listed to UL508A and C22.2 No. 14 File E223801
NEMA WD6, 5-15R

Ordering data

--	--

Type	Part No.
DRAC DP 15	6720005421

Type	Part No.
DRAC GF 15	6720005422