


SDC Series





100 AMP - MULTI POSITION 200 Amp Mains c/w Blank Compartment

CATALOGUE #	DESCRIPTION	METER POSITIONS	ENCLOSURE SIZE A X B X C	WEIGHT
SDC220PW	c/w blank compartment on left side - 2 gang	2	22 ¹ / ₂ " x 12" x 5"	24 lbs.
SDC320PW	c/w blank compartment on left side - 3 gang	3	30" x 12" x 5"	32 lbs.
SDC420PW	c/w blank compartment on left side - 4 gang	4	37 ¹ / ₂ " x 12" x 5"	40 lbs.
SDC520PW	As Above - 5 gang	5	45" x 12" x 5"	47 lbs.
SDC620PW	As Above - 6 gang	6	52" x 12" x 5"	56 lbs.
SDC220PWBC	1 - 3" KO in bottom	2	26 ¹ / ₄ " x 15" x 5"	32 lbs.

- Factory Bussed - 200 Amp mains
- 2 - 4 position horizontal
- 4 Jaw meter sockets
- 100 Amp - 600 VOLTS per position
- All units above c/w 3" KO for BC
- Approved conductor range:
Line No. 6-250 MCM CU/AL
Load No. 6-1/0 AWG CU/AL
- Approved for overhead or underground use

- Field adaptable accessories
- 5th Jaw at 9 O'clock - SXK503
- For overhead "SXC" hub
- Add "RH" if right hand entry required, contact Sales Office for pricing

KNOCKOUT CODE	CONDUIT SIZE
D	1 ¹ / ₄ ", 1 ¹ / ₂ ", 2"
F	1, 1 ¹ / ₄ ", 1 ¹ / ₂ ", 2", 2 ¹ / ₂ ", 3"
AA	1 ¹ / ₂ "

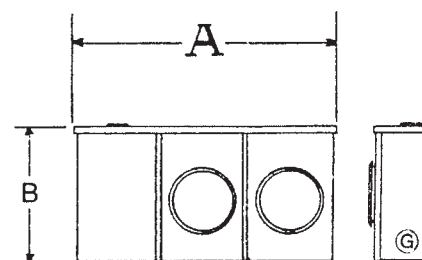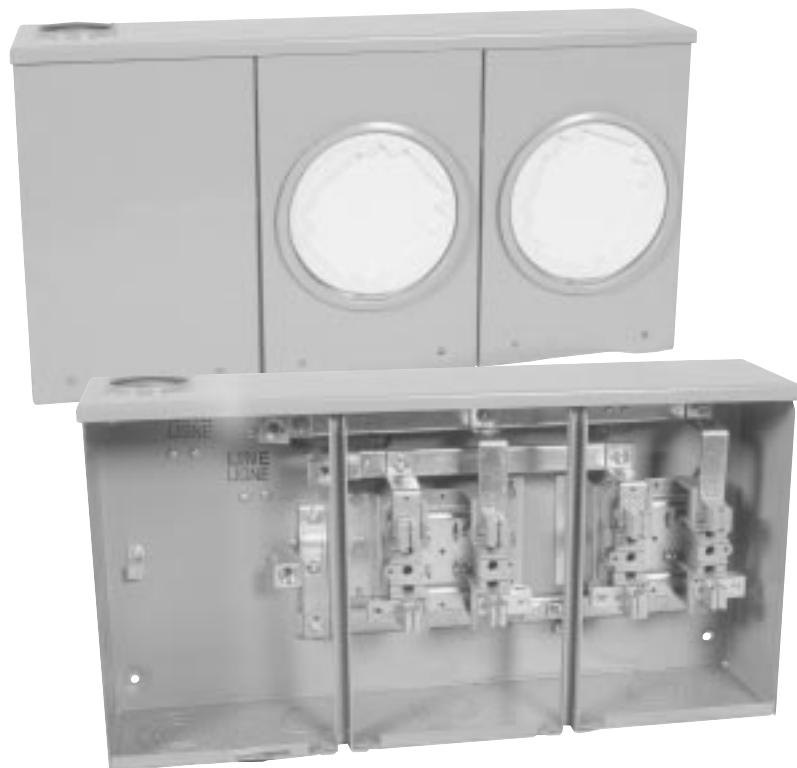

Extra Wing Compartment

