



Nylon Insulated Support Sleeve

Nylon insulated colour coded barrel styles offer the ultimate in high-performance terminal design and construction. Tin-plated brass sleeve strengthens barrel and secures wire to protect against stress and high vibration. Permanently-attached colour-coded Nylon insulating sleeve extends beyond the metal support sleeve. Funnel ferrule wire entrance into electrical barrel eliminates wire strand 'hang-up', increases crimping rates and wire termination reliability. Operating Temperature Range: continuous duty from -67°F to 221°F (-55°C to 105°C).

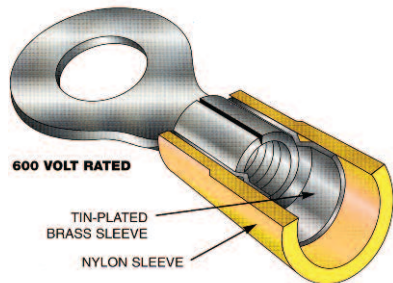

Copper Solid and Stranded Wire Only



Terminals are NOT Actual Size

12-10 WIRE RANGE

.032 Stock

600 Volts

Stud Size	Part Number	Stud Size	Part Number
4-6	R6C6S	4-6	BS6C6
4-6	R6C6	8	BS6C8
6-8	R6C8S	10	BS6C10
6-8	R6C8	14	BS6C14
8-10	R6C10	Seamless Butt B8C	
12-1/4	R6C14S		
1/4-5/16	R6C56S		
1/4-5/16	R6C56		
5/16-3/8	R6C38		
7/16-1/2	R6C50		

Part Number	W	L
B8C		1.240"
BS6C10	0.323"	1.117"
BS6C14	0.352"	1.010"
BS6C6	0.323"	1.160"
BS6C8	0.322"	1.163"
R6C10	0.374"	1.071"
R6C14S	0.531"	1.332"
R6C38	0.589"	1.434"
R6C50	0.747"	1.655"
R6C56	0.589"	1.433"
R6C56S	0.532"	1.336"
R6C6	0.375"	1.174"
R6C6S	0.292"	1.047"
R6C8	0.375"	1.047"
R6C8S	0.287"	1.131"

Terminals accept .225" Max. Wire Ins. Dia.; Splices - .210"



Add suffix "M" for 1000 pack
 Add suffix "P" for Pro Pack (Quantities vary by Part #)

Approved installation tool: RHT-1990/192850013
 Economy installation tools: RAT-NYL, 453, HTS1000
 See pages E-2 to E-5 for installation tools.

B